



(43) International Publication Date
3 December 2015 (03.12.2015)

(51) International Patent Classification:

H04B 7/04 (2006.01) *H03H 7/40* (2006.01)
H04B 1/04 (2006.01)

(21) International Application Number:

PCT/IB2015/052974

(22) International Filing Date:

23 April 2015 (23.04.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1401221 28 May 2014 (28.05.2014) FR

(71) Applicant (for all designated States except US):

TEKCEM [FR/FR]; 12 chemin des Hauts de Clairefontaine, F-78580 Maule (FR).

(72) Inventors; and

(71) Applicants (for US only): **BROYDE, Frederic** [FR/FR]; 12 chemin des Hauts de Clairefontaine, F-78580 Maule (FR). **CLAVELIER, Evelyne** [FR/FR]; 12 chemin des Hauts de Clairefontaine, F-78580 Maule (FR).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: RADIO COMMUNICATION USING A PLURALITY OF SELECTED ANTENNAS

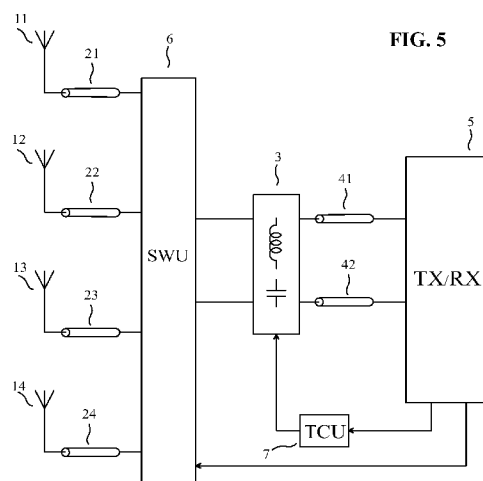

(57) Abstract: The invention relates to a method for radio communication using a plurality of antennas, and to an apparatus for radio communication using a plurality of antennas. An apparatus for radio communication of the invention comprises: 4 antennas (11) (12) (13) (14); a radio device (5); an antenna tuning apparatus (3) having 2 antenna ports and 2 radio ports, each of the radio ports being coupled to the radio device (5) through an interconnection (41) (42); a switching unit (6) comprising 4 input ports each coupled to one of the antennas through a feeder (21) (22) (23) (24), and 2 output ports, the switching unit operating in an active configuration in which it provides a path between any one of the output ports and one of the input ports, the active configuration being determined by a configuration instruction generated by the radio device; and a tuning control unit (7), the tuning control unit receiving a tuning instruction generated by the radio device, the tuning control unit delivering a plurality of tuning control signals to the antenna tuning apparatus.

WO 2015/181653 A1

Radio communication using a plurality of selected antennas

FIELD OF THE INVENTION

5 The invention relates to a method for radio communication using a plurality of antennas. The invention also relates to an apparatus for radio communication using a plurality of antennas. The received or emitted radio signals may carry information of any nature, for instance signals for speech transmission and/or image transmission (television) and/or data transmission. The received or emitted radio signals may be used for any type of operation, for instance
10 broadcasting, bidirectional point-to-point radio communication or radio communication in a cellular network.

The French patent application number 14/01221 of 28 May 2014, entitled “Communication radio utilisant une pluralité d’antennes sélectionnées” is incorporated by reference.

15 PRIOR ART

The impedance presented by an antenna depends on the frequency and on the electromagnetic characteristics of the volume surrounding the antenna. In particular, if the antenna is built in a portable transceiver, for instance a mobile phone, the body of the user has an effect on the impedance presented by the antenna, and this impedance depends on the
20 position of the body of the user. This is referred to as “user interaction”, or “hand effect” or “finger effect”.

An antenna tuning apparatus, also referred to as antenna tuner, is a passive apparatus intended to be inserted between a radio device, for instance a radio transmitter or a radio receiver, and its antenna to obtain that the impedance seen by the radio device matches a target
25 value. Figure 1 shows a block diagram of a typical use of such an antenna tuning apparatus (31) for tuning a single antenna (11), the antenna operating (or being used) in a given frequency band. The antenna tuning apparatus (31) comprises:

an antenna port (311), the antenna port being coupled to the antenna (11) through a feeder
30 (21), the antenna port (311) seeing, at a frequency in said given frequency band, an impedance referred to as the impedance seen by the antenna port;

a radio port (312), the radio port being coupled to the radio device (5) through an interconnection (41), the radio port (312) presenting, at said frequency in said given frequency band, an impedance referred to as the impedance presented by the radio
port;

35 one or more adjustable impedance devices, each of the adjustable impedance devices having a reactance at said frequency in said given frequency band, the reactance of any one of the adjustable impedance devices being adjustable and having an influence on the

impedance presented by the radio port.

The radio device (5) is an active equipment for radio communication such as a transmitter, a receiver or a transceiver. The feeder (21) may for instance be a coaxial cable. In some cases, when the antenna tuning apparatus (31) is placed close to the antenna (11), the feeder (21) is not present. The interconnection (41) may for instance be a coaxial cable. In some cases, when the antenna tuning apparatus (31) is placed close to the radio device (5), the interconnection (41) is not present.

An antenna tuning apparatus behaves, at any frequency in the given frequency band, with respect to the antenna port and the radio port, substantially as a passive linear 2-port device. Here, “passive” is used in the meaning of circuit theory, so that the antenna tuning apparatus does not provide amplification. In practice, losses are undesirable for signals applied to the antenna port or the radio port of an antenna tuning apparatus, in the given frequency band. Thus, an ideal antenna tuning apparatus is lossless for signals applied to its antenna port or radio port, in the given frequency band.

Figure 2 shows a schematic diagram of an antenna tuning apparatus (31) which could be used as shown in Figure 1 to tune a single antenna, the antenna being used in a given frequency band. The antenna tuning apparatus shown in Figure 2 comprises:

an antenna port (311) having two terminals (3111) (3112), the antenna port being single-ended;

a radio port (312) having two terminals (3121) (3122), the radio port being single-ended; an adjustable impedance device (313) presenting a negative reactance and being coupled in parallel with the antenna port;

a coil (315);

an adjustable impedance device (314) presenting a negative reactance and being coupled in parallel with the radio port.

An antenna tuning apparatus of the type shown in Figure 2 is for instance used in the article of F. Chan Wai Po, E. de Foucault, D. Morche, P. Vincent and E. Kerhervé entitled “A Novel Method for Synthesizing an Automatic Matching Network and Its Control Unit”, published in *IEEE Transactions on Circuits and Systems — I: Regular Papers*, vol. 58, No. 9, pp. 2225-2236 in September 2011. The article of Q. Gu, J. R. De Luis, A. S. Morris, and J. Hilbert entitled “An Analytical Algorithm for Pi-Network Impedance Tuners”, published in *IEEE Transactions on Circuits and Systems — I: Regular Papers*, vol. 58, No. 12, pp. 2894-2905 in December 2011, and the article of K.R. Boyle, E. Spits, M.A. de Jongh, S. Sato, T. Bakker and A. van Bezooijen entitled “A Self-Contained Adaptive Antenna Tuner for Mobile Phones”, published in *Proceedings of the 6th European Conference on Antenna and Propagation (EUCAP)*, pp. 1804-1808 in March 2012, consider an antenna tuning apparatus of a type similar to the one shown in Figure 2, the main difference being that the coil (315) of Figure 2 is replaced with an adjustable impedance device, the adjustable impedance device being a variable inductor or an

inductor connected in parallel with a variable capacitor.

An antenna tuning apparatus may be used to compensate a variation in the impedance seen by the antenna port, caused by a variation in the frequency of operation, and/or to compensate the user interaction.

5 The impedance matrix presented by a multiport antenna array depends on the frequency and on the electromagnetic characteristics of the volume surrounding the antennas. In particular, if the multiport antenna array is built in a portable transceiver using multiple antennas simultaneously for MIMO communication, for instance a user equipment (UE) of an LTE wireless network, the impedance matrix presented by the multiport antenna array is affected by
10 the user interaction.

Another antenna tuning apparatus, which may be referred to as “multiple-antenna-port and multiple-radio-port antenna tuning apparatus”, is a passive apparatus intended to be inserted between a radio device using multiple antennas simultaneously in a frequency band, for instance a radio transmitter or a radio receiver for MIMO communication, and said multiple antennas,
15 to obtain that the impedance matrix seen by the radio device matches a target value. Figure 3 shows a block diagram of a typical use of such an antenna tuning apparatus (3) for simultaneously tuning 4 antennas (11) (12) (13) (14), the 4 antennas operating in a given frequency band, the 4 antennas forming an antenna array (1). In Figure 3, the antenna tuning apparatus (3) comprises:

20 $n = 4$ antenna ports (311) (321) (331) (341), each of the antenna ports being coupled to one of the antennas (11) (12) (13) (14) through a feeder (21) (22) (23) (24), the antenna ports seeing, at a frequency in said given frequency band, an impedance matrix referred to as the impedance matrix seen by the antenna ports;

$m = 4$ radio ports (312) (322) (332) (342), each of the radio ports being coupled to the radio
25 device (5) through an interconnection (41) (42) (43) (44), the radio ports presenting, at said frequency in said given frequency band, an impedance matrix referred to as the impedance matrix presented by the radio ports;

p adjustable impedance devices, where p is an integer typically greater than or equal to m ,
each of the adjustable impedance devices having a reactance at said frequency in said
30 given frequency band, the reactance of any one of the adjustable impedance devices being adjustable and having an influence on the impedance matrix presented by the radio ports.

A multiple-antenna-port and multiple-radio-port antenna tuning apparatus behaves, at any frequency in the given frequency band, with respect to the n antenna ports and the m radio ports,
35 substantially as a passive linear $(n + m)$ -port device. Here “passive” is again used in the meaning of circuit theory, so that the multiple-antenna-port and multiple-radio-port antenna tuning apparatus does not provide amplification. In practice, losses are undesirable for signals applied to the antenna ports or the radio ports of a multiple-antenna-port and multiple-radio-port antenna

tuning apparatus, in the given frequency band. Thus, an ideal multiple-antenna-port and multiple-radio-port antenna tuning apparatus is lossless for signals applied to its antenna ports or radio ports, in the given frequency band.

Figure 4 shows a schematic diagram of an antenna tuning apparatus (3) which could be used as shown in Figure 3 to tune 4 antennas, the antennas being used in a given frequency band. The antenna tuning apparatus shown in Figure 4 comprises:

- $n = 4$ antenna ports (311) (321) (331) (341), each of the antenna ports being single-ended;
- $m = 4$ radio ports (312) (322) (332) (342), each of the radio ports being single-ended;
- n adjustable impedance devices (301) each presenting a negative reactance and each being coupled in parallel with one of the antenna ports;
- $n(n - 1)/2$ adjustable impedance devices (302) each presenting a negative reactance and each having a first terminal coupled to one of the antenna ports and a second terminal coupled to one of the antenna ports which is different from the antenna port to which the first terminal is coupled;
- $n = m$ windings (303) each having a first terminal coupled to one of the antenna ports and a second terminal coupled to one of the radio ports;
- m adjustable impedance devices (304) each presenting a negative reactance and each being coupled in parallel with one of the radio ports;
- $m(m - 1)/2$ adjustable impedance devices (305) each presenting a negative reactance and each having a first terminal coupled to one of the radio ports and a second terminal coupled to one of the radio ports which is different from the radio port to which the first terminal is coupled.

A multiple-antenna-port and multiple-radio-port antenna tuning apparatus of the type shown in Fig. 4 is disclosed in the French patent application number 12/02542 entitled “Appareil d'accord d'antenne pour un réseau d'antennes à accès multiples” and in the corresponding international application PCT/IB2013/058423 (WO 2014/049475) entitled “Antenna tuning apparatus for a multiport antenna array”.

A multiple-antenna-port and multiple-radio-port antenna tuning apparatus may be used to compensate a variation in the impedance matrix seen by the antenna ports, caused by a variation in the frequency of operation, and/or to compensate the user interaction.

An antenna tuning apparatus may be such that the reactance value of any one of its adjustable impedance devices is adjusted manually. This type of manual tuning requires a skilled operator, and is for instance implemented to adjust some antenna tuning apparatuses for radio amateurs, having a single antenna port and a single radio port as shown in Fig. 1 and Fig. 2.

An antenna tuning apparatus may be such that the reactance of each of its adjustable impedance devices is adjustable by electrical means. Such an antenna tuning apparatus may be such that the reactance value of any one of its adjustable impedance devices is adjusted automatically or adaptively. In this case, if the antenna tuning apparatus and the circuits

providing an automatic or adaptive adjustment of its adjustable impedance devices form a single device, this device may be referred to as “automatic antenna tuning apparatus”, or “automatic antenna tuner” or “adaptive antenna tuner”.

Automatic antenna tuning has been applied for a long time to an antenna tuning apparatus
5 having a single antenna port and a single radio port, as shown in the patent of the United States of America number 2,745,067 entitled “Automatic Impedance Matching Apparatus”, and in the patent of the United States of America number 4,493,112 entitled “Antenna Tuner Discriminator”. Automatic antenna tuning applied to an antenna tuner having a single antenna port and a single radio port is also the subject matter of current research work, some of which
10 is for instance described in said technical articles entitled “A Novel Method for Synthesizing an Automatic Matching Network and Its Control Unit”, “An Analytical Algorithm for Pi-Network Impedance Tuners”, and “A Self-Contained Adaptive Antenna Tuner for Mobile Phones”.

Automatic antenna tuning has recently been applied to a multiple-antenna-port and multiple-
15 radio-port antenna tuning apparatus, as shown in the patent of the United States of America number 8,059,058 entitled “Antenna system and method for operating an antenna system”, in the French patent application number 12/02564 entitled “Procédé et dispositif pour la réception radio utilisant un appareil d'accord d'antenne et une pluralité d'antennes”, corresponding to the international application number PCT/IB2013/058574 (WO 2014/049486) entitled “Method and
20 device for radio reception using an antenna tuning apparatus and a plurality of antennas”, and in the French patent application number 13/00878 entitled “Procédé et appareil pour accorder automatiquement une matrice impédance, et émetteur radio utilisant cet appareil”, corresponding to the international application number PCT/IB2014/058933 (WO 2014/170766) entitled “Method and apparatus for automatically tuning an impedance matrix, and radio transmitter
25 using this apparatus”.

However, an important limitation of the state of the art relating to automatic antenna tuning applied to a multiple-antenna-port and multiple-radio-port antenna tuning apparatus is that a large number of expensive electrically adjustable impedance devices is required.

SUMMARY OF THE INVENTION

30 The purposes of the invention are a method and an apparatus for radio communication using an antenna tuning apparatus and a plurality of antennas, without the above-mentioned limitations of known techniques.

In what follows, “having an influence” and “having an effect” have the same meaning.

The method of the invention is a method for radio communication with several antennas in
35 a given frequency band, using an apparatus for radio communication that includes N antennas, where N is an integer greater than or equal to 3, each of the N antennas being such that it can

operate at any frequency in the given frequency band, the method comprising the steps of:

selecting n antennas among the N antennas, where n is an integer greater than or equal to 2 and less than or equal to N minus 1, using a switching unit comprising N input ports and n output ports, each of the N input ports being coupled, directly or indirectly, to one of the N antennas, the switching unit providing, for signals in the given frequency band and for any one of the n output ports, a path between said any one of the n output ports and one of the input ports, said one of the input ports being coupled to one of the n selected antennas, the n selected antennas being determined by a “configuration instruction”;

coupling the n output ports, directly or indirectly, to n antenna ports of an antenna tuning apparatus comprising, in addition to said n antenna ports, m radio ports and p adjustable impedance devices, where m is an integer greater than or equal to 2 and where p is an integer greater than or equal to $2m$, the p adjustable impedance devices being referred to as “the adjustable impedance devices of the antenna tuning apparatus” and being such that, at a frequency in said given frequency band, each of the adjustable impedance devices of the antenna tuning apparatus has a reactance, the reactance of any one of the adjustable impedance devices of the antenna tuning apparatus being adjustable by electrical means; and

generating a “tuning instruction”, the tuning instruction having an effect on the reactance of each of the adjustable impedance devices of the antenna tuning apparatus.

Each of the N antennas has a port, referred to as “the signal port of the antenna”, comprising two terminals, which can be used to receive and/or to emit electromagnetic waves. It is assumed that each of said N antennas behaves, at any frequency in the given frequency band, with respect to the signal port of the antenna, substantially as a passive antenna, that is to say as an antenna which is linear and does not use an amplifier for amplifying signals received by the antenna or signals emitted by the antenna. As a consequence of linearity, it is possible to define an impedance matrix presented by the n antennas, the definition of which only considers, for each of the antennas, the signal port of the antenna. This matrix is consequently of size $N \times N$. Because of the interactions between the antennas, this matrix need not be diagonal. In particular, the invention may be such that this matrix is not a diagonal matrix.

Each of the N input ports is coupled, directly or indirectly, to one of the N antennas. More precisely, each of the input ports is coupled, directly or indirectly, to the signal port of one of the N antennas. Additionally, each of the n output ports is coupled, directly or indirectly, to one of the n antenna ports of the antenna tuning apparatus. For instance, an indirect coupling may be a coupling through a feeder and/or through a directional coupler.

Said path between any one of the n output ports and one of the input ports is a signal path. It may be a unidirectional path or a bidirectional path. The antenna tuning apparatus may be used to tune said n selected antennas.

The configuration instruction may comprise any type of electrical signal and/or any combination of such electrical signals. The configuration instruction may be generated automatically within the apparatus for radio communication. The tuning instruction may comprise any type of electrical signal and/or any combination of such electrical signals. The tuning instruction may be generated automatically within the apparatus for radio communication.

An apparatus implementing the method of the invention is an apparatus for radio communication using several antennas in a given frequency band, the apparatus for radio communication comprising:

- 10 N antennas, where N is an integer greater than or equal to 3, each of the N antennas being such that it can operate at any frequency in the given frequency band;
- a processing unit, the processing unit delivering a “configuration instruction” and a “tuning instruction”;
- a switching unit comprising N input ports and n output ports, where n is an integer greater than or equal to 2 and less than or equal to N minus 1, each of the N input ports being coupled, directly or indirectly, to one of the N antennas, the switching unit operating in an active configuration determined by the configuration instruction, the active configuration being one of a plurality of allowed configurations, the switching unit providing, in any one of the allowed configurations, for signals in the given frequency band and for any one of the n output ports, a path between said any one of the n output ports and one of the input ports;
- 20 an antenna tuning apparatus comprising n antenna ports, m radio ports and p adjustable impedance devices, where m is an integer greater than or equal to 2 and where p is an integer greater than or equal to $2m$, the p adjustable impedance devices being referred to as “the adjustable impedance devices of the antenna tuning apparatus” and being such that, at a frequency in said given frequency band, each of the adjustable impedance devices of the antenna tuning apparatus has a reactance, the reactance of any one of the adjustable impedance devices of the antenna tuning apparatus being adjustable by electrical means, the n output ports being coupled, directly or indirectly, to the n antenna ports; and
- 30 a tuning control unit, the tuning control unit receiving the tuning instruction, the tuning control unit delivering a plurality of “tuning control signals”, the tuning control signals being determined as a function of the tuning instruction, the reactance of each of the adjustable impedance devices of the antenna tuning apparatus being mainly determined by one or more of the tuning control signals.

The switching unit operates (or is used) in an active configuration determined by the configuration instruction, the active configuration being one of a plurality of allowed configurations, the switching unit providing, in any one of the allowed configurations, for

signals in the given frequency band and for any one of the output ports, a path between said any one of the output ports and one of the input ports. Thus, the switching unit operates in an active configuration which is one of the allowed configurations, and each allowed configuration corresponds to a selection of n input ports among the N input ports. It is also possible to say that
5 the switching unit operates in an active configuration corresponding to a selection of n input ports among the N input ports.

Each allowed configuration corresponds to a selection of n input ports among the N input ports, the switching unit providing, for signals in the given frequency band and for any one of the output ports, a path between said any one of the output ports and one of the selected input
10 ports. This path may preferably be a low loss path for signals in the given frequency band. The specialist understands that a suitable switching unit may comprise one or more electrically controlled switches and/or change-over switches (here, “electrically controlled” means “controlled by electrical means”). In this case, one or more of said electrically controlled switches and/or change-over switches may for instance be an electro-mechanical relay, or a
15 microelectromechanical switch (MEMS switch), or a circuit using one or more PIN diodes and/or one or more insulated-gate field-effect transistors (MOSFETs) as switching devices.

The radio ports present, at said frequency in said given frequency band, an impedance matrix referred to as “the impedance matrix presented by the radio ports”, and the antenna ports see, at said frequency in said given frequency band, an impedance matrix referred to as “the
20 impedance matrix seen by the antenna ports”. It is assumed that said antenna tuning apparatus behaves, at any frequency in the given frequency band, with respect to its antenna ports and its radio ports, substantially as a passive linear device (where “passive” is used in the meaning of circuit theory). More precisely, said antenna tuning apparatus behaves, at any frequency in the given frequency band, with respect to the n antenna ports and the m radio ports, substantially
25 as a passive linear $(n + m)$ -port device. As a consequence of linearity, it is possible to define the impedance matrix presented by the radio ports. As a consequence of passivity, the antenna tuning apparatus does not provide amplification.

An adjustable impedance device is a component comprising two terminals which substantially behave as a passive linear two-terminal circuit element, and which are
30 consequently fully characterized by an impedance which may depend on frequency, this impedance being adjustable. An adjustable impedance device may be adjustable by mechanical means, for instance a variable resistor, a variable capacitor, a network comprising a plurality of capacitors and one or more switches or change-over switches used to cause different capacitors of the network to contribute to the reactance, a variable inductor, a network comprising a
35 plurality of inductors and one or more switches or change-over switches used to cause different inductors of the network to contribute to the reactance, or a network comprising a plurality of open-circuited or short-circuited stubs and one or more switches or change-over switches used to cause different stubs of the network to contribute to the reactance. We note that all examples

in this list, except the variable resistor, are intended to provide an adjustable reactance.

An adjustable impedance device having a reactance which is adjustable by electrical means may be such that it only provides, at said frequency in said given frequency band, a finite set of reactance values, this characteristic being for instance obtained if the adjustable impedance
5 device is:

- a network comprising a plurality of capacitors or open-circuited stubs and one or more electrically controlled switches or change-over switches, such as electro-mechanical relays, or microelectromechanical switches (MEMS switches), or PIN diodes or insulated-gate field-effect transistors (MOSFETs), used to cause different capacitors or open-circuited
10 stubs of the network to contribute to the reactance; or
- a network comprising a plurality of coils or short-circuited stubs and one or more electrically controlled switches or change-over switches used to cause different coils or short-circuited stubs of the network to contribute to the reactance.

An adjustable impedance device having a reactance which is adjustable by electrical means
15 may be such that it provides, at said frequency in said given frequency band, a continuous set of reactance values, this characteristic being for instance obtained if the adjustable impedance device is based on the use of a variable capacitance diode; or a MOS varactor; or a microelectromechanical varactor (MEMS varactor); or a ferroelectric varactor.

The antenna tuning apparatus may be such that the reactance of any one of the adjustable
20 impedance devices of the antenna tuning apparatus has, at said frequency in said given frequency band, if the impedance matrix seen by the antenna ports is equal to a given diagonal impedance matrix, an influence on the impedance matrix presented by the radio ports. This must be interpreted as meaning: the antenna tuning apparatus may be such that, at said frequency in said given frequency band, there exists a diagonal impedance matrix referred to as the given
25 diagonal impedance matrix, the given diagonal impedance matrix being such that, if the impedance matrix seen by the antenna ports is equal to the given diagonal impedance matrix, then the reactance of any one of the adjustable impedance devices of the antenna tuning apparatus has an influence on the impedance matrix presented by the radio ports.

The method of the invention may further comprise the step of controlling one or more
30 characteristics of at least one of the antennas, using at least one antenna control device, said at least one antenna control device being a part of said at least one of the antennas, said at least one antenna control device having at least one parameter having an influence on said one or more characteristics, said at least one parameter being adjustable by electrical means, the tuning instruction having an effect on each of said parameters. In the previous sentence, "each of said
35 parameters" clearly means "each said at least one parameter of each said at least one antenna control device of each said at least one of the antennas". Each of said at least one of the antennas comprises two terminals of said signal port of the antenna, and at least one antenna control device, which may comprise one or more other terminals used for other electrical connections.

Each of said one or more characteristics may for instance be an electrical characteristic such as an impedance at a specified frequency, or an electromagnetic characteristic such as a directivity pattern at a specified frequency. Each of said at least one of the antennas comprises at least one antenna control device having at least one parameter having an effect on one or more characteristics of said each of said at least one of the antennas, said at least one parameter being adjustable by electrical means. Thus, the specialist understands that each of said at least one of the antennas is a tunable passive antenna. A tunable passive antenna may also be referred to as “reconfigurable antenna”. Some authors consider three classes of tunable passive antennas: polarization-agile antennas, pattern-reconfigurable antennas and frequency-agile antennas. The state of the art regarding frequency-agile antennas is for instance described in the article of A. Petosa entitled “An Overview of Tuning Techniques for Frequency-Agile Antennas”, published in *IEEE Antennas and Propagation Magazine*, vol. 54, No. 5, in October 2012.

The apparatus implementing the method of the invention may be such that at least one tunable passive antenna is among said N antennas, said at least one tunable passive antenna comprising at least one antenna control device, one or more characteristics of said at least one tunable passive antenna being controlled using said at least one antenna control device, said at least one antenna control device having at least one parameter having an influence on said one or more characteristics, said at least one parameter being adjustable by electrical means, each of said parameters being mainly determined by one or more of the tuning control signals. In the previous sentence, “each of said parameters” clearly means “each said at least one parameter of each said at least one antenna control device of each said at least one tunable passive antenna”.

As explained in said article of A. Petosa, many different types of antenna control device may be used to control one or more characteristics of any one of the tunable passive antennas. A suitable antenna control device may for instance be:

- an electrically controlled switch or change-over switch, in which case a parameter of the antenna control device having an influence on one or more characteristics of the tunable passive antenna may be the state of the switch or change-over switch;
- an adjustable impedance device, in which case a parameter of the antenna control device having an influence on one or more characteristics of the tunable passive antenna may be the reactance or the impedance of the adjustable impedance device at a specified frequency;
- or
- an actuator arranged to produce a mechanical deformation of the tunable passive antenna, in which case a parameter of the antenna control device having an influence on one or more characteristics of the tunable passive antenna may be a length of the deformation.

If an antenna control device is an electrically controlled switch or change-over switch, it may for instance be an electro-mechanical relay, or a microelectromechanical switch (MEMS switch), or a circuit using one or more PIN diodes and/or one or more insulated-gate field-effect transistors (MOSFETs) as switching devices.

BRIEF DESCRIPTION OF THE DRAWINGS

Other advantages and characteristics will appear more clearly from the following description of particular embodiments of the invention, given by way of non-limiting examples, with reference to the accompanying drawings in which:

- 5 - Figure 1 shows a block diagram of a typical use of an antenna tuning apparatus for tuning a single antenna, and has already been discussed in the section dedicated to the presentation of the prior art;
- Figure 2 shows a schematic diagram of an antenna tuning apparatus which could be used as shown in Figure 1 to tune a single antenna, and has already been discussed in
10 the section dedicated to the presentation of the prior art;
- Figure 3 shows a block diagram of a typical use of an antenna tuning apparatus for simultaneously tuning 4 antennas, and has already been discussed in the section dedicated to the presentation of the prior art;
- Figure 4 shows a schematic diagram of an antenna tuning apparatus which could be
15 used as shown in Figure 3 to simultaneously tune 4 antennas, and has already been discussed in the section dedicated to the presentation of the prior art;
- Figure 5 shows a block diagram of a transceiver for radio communication of the invention, which simultaneously uses 2 selected antennas among 4 antennas;
- Figure 6 shows a schematic diagram of a first switching unit which could be used as
20 shown in Figure 5 to select 2 antennas among 4 antennas;
- Figure 7 shows a schematic diagram of a second switching unit which could be used as shown in Figure 5 to select 2 antennas among 4 antennas;
- Figure 8 shows a schematic diagram of a third switching unit which could be used as shown in Figure 5 to select 2 antennas among 4 antennas;
- 25 - Figure 9 shows a schematic diagram of a first antenna tuning apparatus which could be used as shown in Figure 5 to simultaneously tune 2 selected antennas;
- Figure 10 shows a schematic diagram of a second antenna tuning apparatus which could be used as shown in Figure 5 to simultaneously tune 2 selected antennas;
- Figure 11 shows a block diagram of a transceiver for radio communication of the invention, which simultaneously uses 2 selected antennas among 4 antennas;
- 30 - Figure 12 shows the locations of the four antennas of a mobile phone;
- Figure 13 shows a first typical use configuration (right hand and head configuration);
- Figure 14 shows a second typical use configuration (two hands configuration);
- Figure 15 shows a third typical use configuration (right hand only configuration);
- 35 - Figure 16 shows a block diagram of a transceiver for radio communication of the invention, which simultaneously uses 2 selected antennas among 4 tunable passive antennas.

DETAILED DESCRIPTION OF SOME EMBODIMENTS

First embodiment.

As a first embodiment of an apparatus of the invention, given by way of non-limiting example, we have represented in Figure 5 the block diagram of a portable apparatus for radio communication in a given frequency band, the apparatus for radio communication being a transceiver comprising:

$N = 4$ antennas (11) (12) (13) (14), each of the N antennas being such that it can operate at any frequency in the given frequency band;

5 a radio device (5) which consists of all parts of the apparatus for radio communication which are not shown elsewhere in Figure 5;

10 a switching unit (6), the switching unit receiving a “configuration instruction” generated automatically within the apparatus for radio communication, the switching unit comprising N input ports each coupled to one and only one of the antennas through a feeder (21) (22) (23) (24), the switching unit comprising $n = 2$ output ports, the switching unit operating in an active configuration determined by the configuration instruction, the active configuration being one of a plurality of allowed configurations, any one of the allowed configurations corresponding to a selection of n input ports among the N input ports, the switching unit providing, for any small signal in the given frequency band and for any one of the output ports, a bidirectional path between said
15 any one of the output ports and one and only one input port of said selection of n input ports;

an antenna tuning apparatus (3), the antenna tuning apparatus being a multiple-antenna-port and multiple-radio-port antenna tuning apparatus, the antenna tuning apparatus comprising $n = 2$ antenna ports, each of the output ports being coupled to one and only
20 one of the antenna ports, the antenna tuning apparatus comprising $m = 2$ radio ports, each of the radio ports being coupled to the radio device (5) through an interconnection (41) (42), the antenna tuning apparatus comprising p adjustable impedance devices, where p is an integer greater than or equal to $2m$, the p adjustable impedance devices being referred to as “the adjustable impedance devices of the antenna tuning apparatus” and being such that, at a frequency in said given frequency band, each of the adjustable impedance devices of the antenna tuning apparatus has a reactance, the reactance of any one of the adjustable impedance devices of the antenna tuning apparatus being adjustable by electrical means; and

30 a tuning control unit (7), the tuning control unit receiving a “tuning instruction” generated automatically within the apparatus for radio communication, the tuning control unit delivering a plurality of “tuning control signals” to the antenna tuning apparatus (3),
35

the tuning control signals being determined as a function of the tuning instruction, the reactance of each of the adjustable impedance devices of the antenna tuning apparatus being mainly determined by one or more of the tuning control signals.

Since each of the N input ports is coupled to one and only one of the antennas through a feeder and since each allowed configuration corresponds to a selection of n input ports among the N input ports, it is possible to say that each allowed configuration corresponds to a selection of n antennas among the N antennas. Thus, it is possible to say that the switching unit is used to select n antennas among the N antennas, the switching unit providing, for signals in the given frequency band and for any one of the output ports, a path between said any one of the output ports and one and only one of the input ports, said one and only one of the input ports being coupled to one and only one of the n selected antennas, the n selected antennas being determined by the configuration instruction.

The specialist understands that it is possible to consider that the N antennas (11) (12) (13) (14) operate simultaneously in the given frequency band and form an antenna array having N ports. Any one of the allowed configurations is such that n antennas among the N antennas are selected in said any one of the allowed configurations. Consequently, n antennas among the N antennas are selected in the active configuration. Thus, the specialist understands that it is also possible to consider that the N antennas (11) (12) (13) (14), the feeders (21) (22) (23) (24) and the switching unit (6) form an antenna array having n ports, whose characteristics are controlled by electrical means. Because of the interactions between the N antennas, each of the antennas which is not selected in the active configuration has an influence on the characteristics of the n -port antenna array formed by the N antennas (11) (12) (13) (14), the feeders (21) (22) (23) (24) and the switching unit (6).

The configuration instruction and the tuning instruction are generated repeatedly by the radio device (5), more precisely by a processing unit which is a part of the radio device. For instance, the configuration instruction and the tuning instruction may be generated periodically, for instance every 10 milliseconds. The configuration instruction and the tuning instruction are such that, at the frequency of operation, the impedance matrix presented by the radio ports is close to a specified matrix.

The tuning instruction is a function of the configuration instruction and of one or more variables or quantities such as: information on the efficiency of one or more of the antennas, information on isolation between antennas, one or more operational factors of the apparatus for radio communication, and/or one or more performance metrics of the apparatus for radio communication. The specialist knows how to obtain and use such one or more variables or quantities. The following eighth, ninth, tenth, eleventh and twelfth embodiments are examples in which such one or more variables or quantities are obtained and used. Thus, the specialist understands how the tuning instruction can be determined as a function of said one or more variables or quantities, taking into account the configuration instruction, the interactions

between the antennas and the characteristics of the antenna tuning apparatus.

The specified matrix is such that the impedance matrix seen by the radio device (5) approximates an arbitrary wanted matrix. The specified matrix may for instance be a diagonal matrix. The specialist understands that this overcomes the above-mentioned limitations of known techniques, because, in this first embodiment, a multiple-antenna-port and multiple-radio-port antenna tuning apparatus having only $n = 2$ antenna ports and $m = 2$ radio ports is used, so that a large number of expensive electrically adjustable impedance devices is not required, and because the impedance matrix seen by the radio device approximates an arbitrary wanted matrix.

Another difference between the invention and the prior art is that any one of the signal ports of the antennas is not permanently coupled, directly or through a feeder, to one of the antenna ports of the multiple-antenna-port and multiple-radio-port antenna tuning apparatus. Another difference between the invention and the prior art is that any one of the antenna ports of the multiple-antenna-port and multiple-radio-port antenna tuning apparatus is not permanently coupled, directly or through a feeder, to one of the signal ports of the antennas.

The body of the user has an effect on the impedance matrix presented by the antenna array, and this impedance matrix depends on the position of the body of the user. As said above in the prior art section, this is referred to as “user interaction”, or “hand effect” or “finger effect”, like the effect of the user’s body on the impedance presented by a single antenna.

Since the impedance matrix seen by the radio device can approximate an arbitrary wanted matrix, the invention compensates an arbitrary variation in the impedance matrix presented by the antenna array, caused by the user interaction or by a variation in the frequency of operation. Thus, the invention compensates the user interaction.

In this first embodiment, $n = m = 2$. However, it is also possible that n is greater than or equal to 3, it is also possible that n is greater than or equal to 4, it is also possible that m is greater than or equal to 3, and it is also possible that m is greater than or equal to 4. In this first embodiment, $N = 4$. Thus, it is possible that N is greater than or equal to 4.

Second embodiment.

The second embodiment of an apparatus of the invention, given by way of non-limiting example, also corresponds to the portable apparatus for radio communication represented in Figure 5, and all explanations provided for the first embodiment are applicable to this second embodiment. Additionally, we have represented in Figure 6 the switching unit (6) used in this second embodiment. This switching unit comprises:

$N = 4$ input ports (611) (621) (631) (641), each of the input ports being single-ended;

$n = 2$ output ports (612) (622), each of the output ports being single-ended; and

n electrically controlled change-over switches (601) each having 1 circuit and N positions (such a switch may be referred to as SP4T in this second embodiment, since $N = 4$).

All change-over switches (601) used in the switching unit of this second embodiment use PIN diodes as switching devices and are electrically controlled, but the control circuits and the control links needed to control the position of each of the change-over switches are not shown in Figure 6. These control circuits receive the configuration instruction and are such that the switching unit operates in an active configuration determined by the configuration instruction. The active configuration is one of a plurality of allowed configurations.

In the active configuration shown in Fig. 6, the switching unit provides, for signals in the given frequency band, a bidirectional path between a first output port (612) and a first input port (641), and a bidirectional path between a second output port (622) and a second input port (621). Thus, in this active configuration, the n selected input ports are different from one another. More generally, each of the allowed configurations is such that it corresponds to a selection of n input ports among the N input ports, in which the n selected input ports are different from one another. Thus, some combinations of the positions of the electrically controlled change-over switches cannot correspond to an allowed configuration.

The specialist sees that, in this second embodiment, the plurality of allowed configurations may be such that, for any one of the N input ports, there exists at least one allowed configuration in which the switching unit provides, for signals in the given frequency band, a path between one of the output ports and said any one of the N input ports. Equivalently, the plurality of allowed configurations may be such that, for any one of the N input ports, there exists at least one allowed configuration in which said any one of the N input ports is selected (that is to say: there exists at least one allowed configuration such that it corresponds to a selection of n input ports among the N input ports, this selection including said any one of the N input ports). Equivalently, the plurality of allowed configurations may be such that, for any one of the N antennas, there exists at least one allowed configuration in which said any one of the N antennas is selected (that is to say: there exists at least one allowed configuration such that it corresponds to a selection of n antennas among the N antennas, this selection including said any one of the N antennas).

In this second embodiment, the specialist sees that the switching unit is such that, in any one of the allowed configurations, if an input port is such that the switching unit does not provide, for signals in the given frequency band, a path between one of the output ports and said input port, then a single terminal of said input port is left open-circuited. Equivalently, in any one of the allowed configurations, an input port which is not selected has a single terminal which is left open-circuited.

Third embodiment.

The third embodiment of an apparatus of the invention, given by way of non-limiting example, also corresponds to the portable apparatus for radio communication represented in

Figure 5, and all explanations provided for the first embodiment are applicable to this third embodiment. Additionally, we have represented in Figure 7 the switching unit (6) used in this third embodiment. This switching unit comprises:

$N = 4$ input ports (611) (621) (631) (641);

5 $n = 2$ output ports (612) (622);

N electrically controlled change-over switches (602) each having 1 circuit and $n + 1$ positions (such a switch may be referred to as SP3T in this third embodiment, since $n = 2$); and

N passive linear two-terminal devices (603).

10 All change-over switches (602) used in the switching unit of this third embodiment use MOSFETs as switching devices and are electrically controlled, but the control circuits and the control links needed to control the position of each of the change-over switches are not shown in Figure 7. These control circuits receive the configuration instruction and are such that the switching unit operates in an active configuration determined by the configuration instruction.

15 The active configuration is one of a plurality of allowed configurations.

In the active configuration shown in Fig. 7, the switching unit provides, for signals in the given frequency band, a bidirectional path between a first output port (612) and a first input port (641), and a bidirectional path between a second output port (622) and a second input port (621). Thus, in this active configuration, the n selected input ports are different from one another. More generally, each of the allowed configurations is such that it corresponds to a selection of n input ports among the N input ports, the n selected input ports being different from one another. Thus, some combinations of the positions of the electrically controlled change-over switches cannot correspond to an allowed configuration.

25 In this third embodiment, the specialist sees that the switching unit is such that, in any one of the allowed configurations, if an input port is such that the switching unit does not provide, for signals in the given frequency band, a path between one of the output ports and said input port, then said input port is coupled to one of the passive linear two-terminal devices. Equivalently, in any one of the allowed configurations, an input port which is not selected is coupled to one of the passive linear two-terminal devices. For instance, any one of the passive
30 linear two-terminal devices may be a capacitor, a resistor, or a short-circuit.

Fourth embodiment.

The fourth embodiment of an apparatus of the invention, given by way of non-limiting example, also corresponds to the portable apparatus for radio communication represented in Figure 5, and all explanations provided for the first embodiment are applicable to this fourth
35 embodiment. Additionally, we have represented in Figure 8 the switching unit (6) used in this fourth embodiment. This switching unit comprises:

$N = 4$ input ports (611) (621) (631) (641);

$n = 2$ output ports (612) (622);

N electrically controlled change-over switches (602) each having 1 circuit and $n + 1$ positions (such a switch may be referred to as SP3T in this fourth embodiment, since
5 $n = 2$); and

N electrically controlled change-over switches (604) each having 1 circuit and 2 positions (such a switch may be referred to as SP2T).

All change-over switches (602) (604) used in the switching unit of this fourth embodiment use MEMS switches as switching devices and are electrically controlled, but the control circuits
10 and the control links needed to control the position of each of the change-over switches are not shown in Figure 8. These control circuits receive the configuration instruction and are such that the switching unit operates in an active configuration determined by the configuration instruction. The active configuration is one of a plurality of allowed configurations.

In the active configuration shown in Fig. 8, the switching unit provides, for signals in the
15 given frequency band, a bidirectional path between a first output port (612) and a first input port (641), and a bidirectional path between a second output port (622) and a second input port (621). Thus, in this active configuration, the n selected input ports are different from one another. More generally, each of the allowed configurations is such that it corresponds to a selection of n input ports among the N input ports, in which the n selected input ports are different from one another.
20 Thus, some combinations of the positions of the electrically controlled change-over switches cannot correspond to an allowed configuration.

In this fourth embodiment, the switching unit is such that, in any one of the allowed configurations, if an input port is such that the switching unit does not provide, for signals in the given frequency band, a path between one of the output ports and said input port, then both
25 terminals of said input port are left open-circuited. Equivalently, in any one of the allowed configurations, the terminals of an input port which is not selected are left open-circuited. The article of S. Zhang, K. Zhao, Z. Ying and S. He, entitled "Adaptive Quad-Element Multi-Wideband Antenna Array for User-Effective LTE MIMO Mobile Terminals", published in *IEEE Transactions on Antennas and Propagation*, vol. 61, No. 8, pages 4275-4283, in August 2013,
30 indicates that this characteristic may be advantageous. However, the device described in this article is entirely different from the present invention because it does not comprise a multiple-antenna-port and multiple-radio-port antenna tuning apparatus, and it cannot compensate an arbitrary variation in the impedance matrix presented by the antenna array, caused by the user interaction or by a variation in the frequency of operation. Thus, the device described in this
35 article does not compensate the user interaction.

Fifth embodiment.

The fifth embodiment of an apparatus of the invention, given by way of non-limiting example, also corresponds to the portable apparatus for radio communication represented in Figure 5, and all explanations provided for the first embodiment are applicable to this fifth
5 embodiment.

In this fifth embodiment, the antenna tuning apparatus (3) is an antenna tuning apparatus disclosed in said French patent application number 12/02542 and said international application PCT/IB2013/058423. Thus, the antenna tuning apparatus (3) is such that the reactance of any one of the adjustable impedance devices of the antenna tuning apparatus has, at said frequency
10 in said given frequency band, if the impedance matrix seen by the antenna ports is equal to a given diagonal impedance matrix, an influence on the impedance matrix presented by the radio ports, and such that the reactance of at least one of the adjustable impedance devices of the antenna tuning apparatus has, at said frequency in said given frequency band, if the impedance matrix seen by the antenna ports is equal to the given diagonal impedance matrix, an influence
15 on at least one non-diagonal entry of the impedance matrix presented by the radio ports. This must be interpreted as meaning: the antenna tuning apparatus is such that, at said frequency in said given frequency band, there exists a diagonal impedance matrix referred to as the given diagonal impedance matrix, the given diagonal impedance matrix being such that, if an impedance matrix seen by the antenna ports is equal to the given diagonal impedance matrix, then (a) the reactance of any one of the adjustable impedance devices of the antenna tuning
20 apparatus has an influence on an impedance matrix presented by the radio ports, and (b) the reactance of at least one of the adjustable impedance devices of the antenna tuning apparatus has an influence on at least one non-diagonal entry of the impedance matrix presented by the radio ports. In the two previous sentences, “an influence” could be replaced with “an effect”.

The specialist understands that the antenna tuning apparatus (3) cannot be made up of a plurality of independent and uncoupled antenna tuning apparatuses each having a single antenna port and a single radio port, because in this case, if the impedance matrix seen by the antenna ports is equal to any diagonal impedance matrix, then the impedance matrix presented by the radio ports is a diagonal matrix, the non-diagonal entries of which cannot be influenced by
30 anything.

Moreover, the antenna tuning apparatus (3) is such that, at said frequency in said given frequency band, if the impedance matrix seen by the antenna ports is equal to a given non-diagonal impedance matrix, a mapping associating the impedance matrix presented by the radio ports to the p reactances is defined, the mapping having, at a given value of each of the p
35 reactances, a partial derivative with respect to each of the p reactances, a span of the p partial derivatives being defined in the set of the complex matrices of size $m \times m$ considered as a real vector space, any diagonal complex matrix of size $m \times m$ having the same diagonal entries as

at least one element of the span of the p partial derivatives. This must be interpreted as meaning: the antenna tuning apparatus is such that, at said frequency in said given frequency band, there exists a non-diagonal impedance matrix referred to as the given non-diagonal impedance matrix, the given non-diagonal impedance matrix being such that, if an impedance matrix seen by the antenna ports is equal to the given non-diagonal impedance matrix, then a mapping associating an impedance matrix presented by the radio ports to the p reactances is defined, the mapping having, at a given value of each of the p reactances, a partial derivative with respect to each of the p reactances, a span of the p partial derivatives being defined in the set of the complex matrices of size $m \times m$ considered as a real vector space, any diagonal complex matrix of size $m \times m$ having the same diagonal entries as at least one element of the span of the p partial derivatives.

The specialist knows that the dimension of the span of the p partial derivatives considered as a real vector space has been used and explained: in said French patent application number 12/02542; in said international application PCT/IB2013/058423; and in the sections I, III, VI, VII and VIII of the article of F. Broydé and E. Clavelier entitled “Some Properties of Multiple-Antenna-Port and Multiple-User-Port Antenna Tuners”, published in *IEEE Trans. on Circuits and Systems — I: Regular Papers*, Vol. 62, No. 2, pp. 423-432, in February 2015, where said dimension of the span of the p partial derivatives is referred to as the local dimension of the user port impedance range, and denoted by $D_{UR}(Z_{Sant})$.

Thus, the specialist understands that any small variation in the impedance matrix of the antenna array, caused by a change in operating frequency or a change in the medium surrounding the antennas, can be at least partially compensated with a new adjustment of the adjustable impedance devices of the antenna tuning apparatus.

More generally, a specialist understands that, to obtain that any diagonal complex matrix of size $m \times m$ has the same diagonal entries as at least one element of the span of the p partial derivatives, it is necessary that the dimension of the span of the p partial derivatives considered as a real vector space is greater than or equal to the dimension of the subspace of the diagonal complex matrices of size $m \times m$ considered as a real vector space. Since the dimension of the span of the p partial derivatives considered as a real vector space is less than or equal to p , and since the dimension of the subspace of the diagonal complex matrices of size $m \times m$ considered as a real vector space is equal to $2m$, the necessary condition implies that p is an integer greater than or equal to $2m$. This is why the requirement “ p is an integer greater than or equal to $2m$ ” is an essential characteristic of the invention.

Sixth embodiment.

The sixth embodiment of an apparatus of the invention, given by way of non-limiting example, also corresponds to the portable apparatus for radio communication represented in Figure 5, and all explanations provided for the first embodiment and the fifth embodiment are

applicable to this sixth embodiment. The antenna tuning apparatus (3) used in this sixth embodiment is shown in Figure 9 and it comprises:

- $n = 2$ antenna ports (311) (321), each of the antenna ports being single-ended;
- $m = 2$ radio ports (312) (322), each of the radio ports being single-ended;
- 5 n adjustable impedance devices of the antenna tuning apparatus (301) each presenting a negative reactance and each being coupled in parallel with one of the antenna ports;
- $n (n - 1)/2$ adjustable impedance devices of the antenna tuning apparatus (302) each presenting a negative reactance and each having a first terminal coupled to one of the antenna ports and a second terminal coupled to one of the antenna ports which is
- 10 different from the antenna port to which the first terminal is coupled;
- $n = m$ windings (303) each having a first terminal coupled to one of the antenna ports and a second terminal coupled to one of the radio ports;
- m adjustable impedance devices of the antenna tuning apparatus (304) each presenting a negative reactance and each being coupled in parallel with one of the radio ports;
- 15 $m (m - 1)/2$ adjustable impedance devices of the antenna tuning apparatus (305) each presenting a negative reactance and each having a first terminal coupled to one of the radio ports and a second terminal coupled to one of the radio ports which is different from the radio port to which the first terminal is coupled.

It is possible that mutual induction exists between the windings (303). In this case, the

20 inductance matrix of the windings is not a diagonal matrix.

All adjustable impedance devices of the antenna tuning apparatus (301) (302) (304) (305) are adjustable by electrical means, but the circuits and the control links needed to determine the reactance of each of the adjustable impedance devices of the antenna tuning apparatus are not shown in Figure 9. In this sixth embodiment, we have $n = m$ and we use $p = m (m + 1) = 6$

25 adjustable impedance devices of the antenna tuning apparatus.

The specialist understands that, at a frequency at which the antenna tuning apparatus is intended to operate, if the impedance matrix seen by the antenna ports is a diagonal matrix having all its diagonal entries equal to 50Ω , the reactance of any one of the adjustable impedance devices of the antenna tuning apparatus has an influence on the impedance matrix presented by the radio ports, and the reactance of one or more of the adjustable impedance devices of the antenna tuning apparatus has an influence on one or more of the non-diagonal entries of the impedance matrix presented by the radio ports.

30

The impedance matrix seen by the antenna ports being a given symmetric complex matrix, it is possible to show that, for suitable component values, the p partial derivatives defined above

35 in the section on the fifth embodiment are linearly independent in the real vector space of the complex matrices of size $m \times m$, this vector space, denoted by E , being of dimension $2m^2$. Thus, the span of the p partial derivatives in E is a subspace of dimension p equal to the set of the symmetric complex matrices of size $m \times m$. Here, any symmetric complex matrix of size $m \times m$

is an element of the span of the p partial derivatives. Consequently, any diagonal complex matrix of size $m \times m$ has the same diagonal entries as at least one element of the span of the p partial derivatives.

The reactance of an adjustable impedance device of the antenna tuning apparatus may depend on the ambient temperature, for some types of adjustable impedance devices. If such a type of adjustable impedance device is used in the antenna tuning apparatus, it is possible that the tuning control signals are determined as a function of the tuning instruction and as a function of temperature, to compensate the effect of temperature on the reactance of each of the adjustable impedance devices of the antenna tuning apparatus. At least one of the tuning control signals is determined as a function of the tuning instruction and as a function of temperature, to compensate the effect of temperature on the reactance of at least one of the adjustable impedance devices of the antenna tuning apparatus.

The specialist understands that, as explained in said article entitled “Some Properties of Multiple-Antenna-Port and Multiple-User-Port Antenna Tuners” and in the article of F. Broydé and E. Clavelier entitled “A New Multiple-Antenna-Port and Multiple-User-Port Antenna Tuner”, published in the proceedings of the *2015 IEEE Radio & Wireless Week, RWW 2015*, in January 2015, any small variation in the impedance matrix of the antenna array, caused by a change in operating frequency or a change in the medium surrounding the antennas, can be fully compensated with a new adjustment of the adjustable impedance devices of the antenna tuning apparatus. Thus, it is always possible to compensate the user interaction.

Moreover, said important limitation of the state of the art relating to automatic antenna tuning is overcome by the invention because, for $N = 4$ antennas, this sixth embodiment uses only 6 adjustable impedance devices of the antenna tuning apparatus, instead of the 20 adjustable impedance devices of the antenna tuning apparatus used in figure 4.

25 Seventh embodiment.

The seventh embodiment of an apparatus of the invention, given by way of non-limiting example, also corresponds to the portable apparatus for radio communication represented in Figure 5, and all explanations provided for the first embodiment and the fifth embodiment are applicable to this seventh embodiment. Additionally, the antenna tuning apparatus (3) used in this seventh embodiment is shown in Figure 10 and it comprises:

- $n = 2$ antenna ports (311) (321), each of the antenna ports being single-ended;
- $m = 2$ radio ports (312) (322), each of the radio ports being single-ended;
- n adjustable impedance devices of the antenna tuning apparatus (301) each presenting a negative reactance and each being coupled in parallel with one of the antenna ports;
- 35 $n(n - 1)/2$ capacitors (306) each having a first terminal coupled to one of the antenna ports and a second terminal coupled to one of the antenna ports which is different from the antenna port to which the first terminal is coupled;

$n = m$ windings (303) each having a first terminal coupled to one of the antenna ports and a second terminal coupled to one of the radio ports;

m adjustable impedance devices of the antenna tuning apparatus (304) each presenting a negative reactance and each being coupled in parallel with one of the radio ports;

5 $m(m - 1)/2$ capacitors (307) each having a first terminal coupled to one of the radio ports and a second terminal coupled to one of the radio ports which is different from the radio port to which the first terminal is coupled.

It is possible that mutual induction exists between the windings (303). In this case, the inductance matrix of the windings is not a diagonal matrix.

10 All adjustable impedance devices of the antenna tuning apparatus (301) (304) are adjustable by electrical means, but the circuits and the control links needed to determine the reactance of each of the adjustable impedance devices of the antenna tuning apparatus are not shown in Figure 10.

The specialist understands that, at a frequency at which the antenna tuning apparatus is 15 intended to operate, if the impedance matrix seen by the antenna ports is a diagonal matrix having all its diagonal entries equal to 50Ω , the reactance of any one of the adjustable impedance devices of the antenna tuning apparatus has an influence on the impedance matrix presented by the radio ports, and the reactance of one or more of the adjustable impedance devices of the antenna tuning apparatus has an influence on one or more of the non-diagonal 20 entries of the impedance matrix presented by the radio ports.

For suitable component values, it is possible to show that the $p = 4$ partial derivatives are linearly independent in the real vector space of the complex matrices of size $m \times m$, denoted by E . Thus, the span of the p partial derivatives in E is of dimension 4. It is also possible to show that any diagonal complex matrix of size $m \times m$ has the same diagonal entries as at least one 25 element of the span of the p partial derivatives.

The specialist understands that any small variation in the impedance matrix of the antenna array, caused by a change in operating frequency or a change in the medium surrounding the antennas, can be partially compensated with a new adjustment of the adjustable impedance devices of the antenna tuning apparatus.

30 Moreover, said important limitation of the state of the art relating to automatic antenna tuning is overcome by the invention because, for $N = 4$ antennas, this seventh embodiment uses only 4 adjustable impedance devices of the antenna tuning apparatus, instead of the 20 adjustable impedance devices of the antenna tuning apparatus used in figure 4.

If the capacitors (306) (307) shown in Fig. 10 were not present in Fig. 10, and if mutual 35 induction did not exist between the windings (303), then the antenna tuning apparatus (3) comprising $n = 2$ antenna ports and $m = 2$ radio ports would in fact be made up of $n = 2$ antenna tuning apparatuses each having a single antenna port and a single radio port, these antenna tuning apparatuses each having a single antenna port and a single radio port being independent

and uncoupled. In this case, the method of the invention may become a method for radio communication with several antennas in a given frequency band, using an apparatus for radio communication that includes N antennas, where N is an integer greater than or equal to 3, each of the N antennas being such that it can operate at any frequency in the given frequency band,
5 the method comprising the steps of:

selecting n antennas among the N antennas, where n is an integer greater than or equal to 2 and less than or equal to N minus 1, using a switching unit comprising N input ports and n output ports, each of the N input ports being coupled, directly or indirectly, to one of the N antennas, the switching unit providing, for any small signal in the given
10 frequency band and for any one of the output ports, a path between said any one of the output ports and one of the input ports, said one of the input ports being coupled to one of the n selected antennas, the n selected antennas being determined by a “configuration instruction”;

coupling the n output ports, directly or indirectly, to n antenna ports of n antenna tuning
15 apparatuses, each of said antenna tuning apparatuses comprising, in addition to one of said n antenna ports, one radio port, and two or more adjustable impedance devices such that, at a frequency in said given frequency band, each of the adjustable impedance devices of said each of said antenna tuning apparatuses has a reactance, the reactance of any one of the adjustable impedance devices being adjustable by electrical
20 means; and

generating a “tuning instruction”, the tuning instruction having an effect on the reactance of each of the adjustable impedance devices of the antenna tuning apparatuses.

In this method, each of the output ports may be coupled, directly or indirectly, to one and only one of the antenna ports of the n antenna tuning apparatuses.

25 An apparatus implementing this method is an apparatus for radio communication using several antennas in a given frequency band, the apparatus for radio communication comprising:

N antennas, where N is an integer greater than or equal to 3, each of the N antennas being such that it can operate at any frequency in the given frequency band;

30 a processing unit, the processing unit delivering a “configuration instruction” and a “tuning instruction”;

a switching unit comprising N input ports and n output ports, where n is an integer greater than or equal to 2 and less than or equal to N minus 1, each of the N input ports being coupled, directly or indirectly, to one of the N antennas, the switching unit operating in an active configuration determined by the configuration instruction, the active
35 configuration being one of a plurality of allowed configurations, the switching unit providing, in any one of the allowed configurations, for any small signal in the given frequency band and for any one of the output ports, a path between said any one of the output ports and one of the input ports;

n antenna tuning apparatuses, each of said antenna tuning apparatuses comprising one antenna port, one radio port, and two or more adjustable impedance devices such that, at a frequency in said given frequency band, each of the adjustable impedance devices of said each of said antenna tuning apparatuses has a reactance, the reactance of any one of the adjustable impedance devices being adjustable by electrical means, the n output ports being coupled, directly or indirectly, to the n antenna ports; and a tuning control unit, the tuning control unit receiving the tuning instruction, the tuning control unit delivering a plurality of “tuning control signals”, the tuning control signals being determined as a function of the tuning instruction, the reactance of each of the adjustable impedance devices of the antenna tuning apparatuses being mainly determined by one or more of the tuning control signals.

Eighth embodiment.

The eighth embodiment of a device of the invention, given by way of non-limiting example, is an apparatus for radio communication comprising a radio receiver implementing a method for radio reception with several antennas in a given frequency band, the apparatus for radio communication including N antennas, where N is an integer greater than or equal to 3, each of the N antennas being such that it can operate at any frequency in the given frequency band, the method comprising the steps of:

selecting n antennas among the N antennas, where n is an integer greater than or equal to 2 and less than or equal to N minus 1, using a switching unit comprising N input ports and n output ports, each of the N input ports being coupled, directly or indirectly, to one of the N antennas, the switching unit providing, for any small signal in the given frequency band and for any one of the n output ports, a path between said any one of the n output ports and one of the input ports, said one of the input ports being coupled to one of the n selected antennas;

coupling the n output ports, directly or indirectly, to n antenna ports of an antenna tuning apparatus comprising, in addition to said n antenna ports, m radio ports and p adjustable impedance devices, where m is an integer greater than or equal to 2 and where p is an integer greater than or equal to $2m$, the p adjustable impedance devices being referred to as “the adjustable impedance devices of the antenna tuning apparatus” and being such that, at a frequency in said given frequency band, each of the adjustable impedance devices of the antenna tuning apparatus has a reactance, the reactance of any one of the adjustable impedance devices of the antenna tuning apparatus being adjustable by electrical means;

processing a plurality of digital signals to estimate one or more quantities representative of a channel matrix;

delivering a “configuration instruction”, the n selected antennas being determined by the configuration instruction; and

delivering a “tuning instruction”, the tuning instruction being a function of said one or more quantities representative of a channel matrix, the tuning instruction having an effect
5 on the reactance of each of the adjustable impedance devices of the antenna tuning apparatus.

The configuration instruction may also be a function of said one or more quantities representative of a channel matrix.

For instance, as in said French patent application number 12/02564 and said international
10 application number PCT/IB2013/058574, the method may be such that, each of the radio ports delivering a signal, each of the digital signals is mainly determined by one and only one of the signals delivered by the radio ports, and such that the channel matrix is a channel matrix between a plurality of signals sent by a transmitter and the m signals delivered by the radio ports. For instance, one or more quantities representative of a channel capacity may be computed
15 as a function of said quantities representative of a channel matrix, the configuration instruction and the tuning instruction being delivered as a function of said one or more quantities representative of a channel capacity. The specialist understands that, in order to compute said one or more quantities representative of a channel capacity, at least one quantity representative of a signal to noise ratio of reception may be estimated.

20 The method may be such that an adaptive process is implemented during one or more training sequences. A training sequence may comprise the emission of a plurality of quasi-orthogonal or orthogonal signals. The configuration instruction and the tuning instruction selected during the latest completed training sequence may be used for radio reception.

The adaptive process may be such that, most of the time, the tuning instruction used for
25 reception is a tuning instruction which, for a chosen configuration instruction, among a finite set of possible tuning instructions, produces values of said one or more quantities representative of a channel capacity which correspond to one of the largest channel capacities (or preferably, to the largest channel capacity).

Ninth embodiment.

30 The ninth embodiment of a device of the invention, given by way of non-limiting example, is an apparatus for radio communication comprising a radio transmitter implementing a method for radio emission with several antennas in a given frequency band, the apparatus for radio communication including N antennas, where N is an integer greater than or equal to 3, each of the N antennas being such that it can operate at any frequency in the given frequency band, the
35 method comprising the steps of:

selecting n antennas among the N antennas, where n is an integer greater than or equal to

2 and less than or equal to N minus 1, using a switching unit comprising N input ports and n output ports, each of the N input ports being coupled, directly or indirectly, to one of the N antennas, the switching unit providing, for any small signal in the given frequency band and for any one of the n output ports, a path between said any one of the n output ports and one of the input ports, said one of the input ports being coupled to one of the n selected antennas;

coupling the n output ports, directly or indirectly, to n antenna ports of an antenna tuning apparatus comprising, in addition to said n antenna ports, m radio ports and p adjustable impedance devices, where m is an integer greater than or equal to 2 and where p is an integer greater than or equal to $2m$, the p adjustable impedance devices being referred to as “the adjustable impedance devices of the antenna tuning apparatus” and being such that, at a frequency in said given frequency band, each of the adjustable impedance devices of the antenna tuning apparatus has a reactance, the reactance of any one of the adjustable impedance devices of the antenna tuning apparatus being adjustable by electrical means;

estimating q real quantities depending on an impedance matrix presented by the radio ports, where q is an integer greater than or equal to m , using m or more different excitations applied successively to the radio ports;

delivering a “configuration instruction”, the n selected antennas being determined by the configuration instruction; and

delivering a “tuning instruction”, the tuning instruction being a function of said q real quantities depending on an impedance matrix presented by the radio ports, the tuning instruction having an effect on the reactance of each of the adjustable impedance devices of the antenna tuning apparatus.

The configuration instruction may also be a function of said q real quantities depending on an impedance matrix presented by the radio ports.

The specialist understands that this ninth embodiment uses some aspects of the technique disclosed in said French patent application number 13/00878 and said international application number PCT/IB2014/058933.

30 Tenth embodiment.

As a tenth embodiment of an apparatus of the invention, given by way of non-limiting example, we have represented in Figure 11 the block diagram of a portable apparatus for radio communication in a given frequency band, the apparatus for radio communication being a transceiver comprising:

35 $N = 4$ antennas (11) (12) (13) (14), each of the N antennas being such that it can operate at any frequency in the given frequency band;

a radio device (5) which consists of all parts of the apparatus for radio communication

which are not shown elsewhere in Figure 11;

a switching unit (6), the switching unit receiving a “configuration instruction” generated automatically within the apparatus for radio communication, the switching unit comprising N input ports each coupled to one and only one of the antennas through a feeder (21) (22) (23) (24), the switching unit comprising $n = 2$ output ports, the switching unit operating in an active configuration determined by the configuration instruction, the active configuration being one of a plurality of allowed configurations, any one of the allowed configurations corresponding to a selection of n input ports among the N input ports, the switching unit providing, for any small signal in the given frequency band and for any one of the output ports, a bidirectional path between said any one of the output ports and one and only one input port of said selection of n input ports;

a sensor unit (8) estimating a plurality of localization variables;

an antenna tuning apparatus (3), the antenna tuning apparatus being a multiple-antenna-port and multiple-radio-port antenna tuning apparatus, the antenna tuning apparatus comprising $n = 2$ antenna ports, each of the output ports being coupled to one and only one of the antenna ports, the antenna tuning apparatus comprising $m = 2$ radio ports, each of the radio ports being coupled to the radio device (5) through an interconnection (41) (42), the antenna tuning apparatus comprising p adjustable impedance devices, where p is an integer greater than or equal to $2m$, the p adjustable impedance devices being referred to as “the adjustable impedance devices of the antenna tuning apparatus” and being such that, at a frequency in said given frequency band, each of the adjustable impedance devices of the antenna tuning apparatus has a reactance, the reactance of any one of the adjustable impedance devices of the antenna tuning apparatus being adjustable by electrical means; and

a tuning control unit (7), the tuning control unit receiving a “tuning instruction” generated automatically within the apparatus for radio communication, the tuning control unit delivering a plurality of “tuning control signals” to the antenna tuning apparatus (3), the tuning control signals being determined as a function of the tuning instruction, the reactance of each of the adjustable impedance devices of the antenna tuning apparatus being mainly determined by one or more of the tuning control signals.

The sensor unit (8) estimates a plurality of localization variables each depending, in a given use configuration, on the distance between a part of a human body and a zone of the apparatus for radio communication. The sensor unit comprises a plurality of sensors. Each of said zones may be a part of the space occupied by the corresponding sensor, this space being inside the space occupied by the apparatus for radio communication, so that in this case each of said zones has a volume much less than the volume of the apparatus for radio communication. For each of the antennas, at least one of the localization variables may depend on the distance between a part

of a human body and a small zone near said each of the antennas. If a suitable sensor is used, said zone may be a point, or substantially a point.

For instance, at least one of the localization variables may be an output of a sensor responsive to a pressure exerted by a part of a human body. For instance, at least one of the
5 localization variables may be an output of a proximity sensor.

The sensor unit (8) assesses (or equivalently, estimates) a plurality of localization variables each depending, in a given use configuration, on the distance between a part of a human body and a zone of the apparatus for radio communication. However, it is possible that one or more
10 other localization variables each depending, in a given use configuration, on the distance between a part of a human body and a zone of the apparatus for radio communication, are not estimated by the sensor unit. For instance, at least one of the localization variables may be determined by a change of state of an output of a touchscreen. Thus, the sensor unit (8) may be regarded as a part of a localization unit which estimates (or evaluates) a plurality of variables,
15 variables depending on the distance between a part of a human body and a zone of the apparatus for radio communication. This part of the localization unit may be the whole localization unit.

The configuration instruction and the tuning instruction are generated automatically within the radio device (5). More precisely, the radio device (5) comprises a processing unit (not shown in Fig. 11) which delivers the configuration instruction and the tuning instruction, each of the
20 localization variables having an influence on the configuration instruction and/or on the tuning instruction. The configuration instruction is determined from a set of pre-defined configuration instructions stored in a lookup table (also spelled “look-up table”) realized in the processing unit, based on the localization variables and on the frequencies used for radio communication with the antennas.

25 The tuning instruction may be determined from a set of pre-defined tuning instructions stored in a lookup table realized in the processing unit, based on the localization variables and on the frequencies used for radio communication with the antennas.

This tenth embodiment may possibly use some aspects of the technique disclosed in the French patent application number 14/00606 entitled “Communication radio utilisant des
30 antennes multiples et des variables de localisation”, corresponding to the international application number PCT/IB2015/051548 of 3 March 2015 entitled “Radio communication using multiple antennas and localization variables”.

Eleventh embodiment (best mode).

The eleventh embodiment of an apparatus of the invention, given by way of non-limiting
35 example and best mode of carrying out the invention, also corresponds to the portable apparatus for radio communication represented in Figure 11, and all explanations provided for the tenth embodiment are applicable to this eleventh embodiment.

In this eleventh embodiment, the apparatus for radio communication is a mobile phone. Figure 12 is a drawing of a back view of the mobile phone (9). Figure 12 shows the point (111) where the center of the first antenna (11) is located, the point (121) where the center of the second antenna (12) is located, the point (131) where the center of the third antenna (13) is located, and the point (141) where the center of the fourth antenna (14) is located.

A finite set of typical use configurations is defined. For instance, Figure 13 shows a first typical use configuration, which may be referred to as the “right hand and head configuration”; Figure 14 shows a second typical use configuration, which may be referred to as the “two hands configuration”; and Figure 15 shows a third typical use configuration, which may be referred to as the “right hand only configuration”. In Fig. 13, Fig. 14 and Fig. 15, the mobile phone (9) is held by the user. More precisely, the user holds the mobile phone close to his head using his right hand in Fig. 13; the user holds the mobile phone far from his head using both hands in Fig. 14; and the user holds the mobile phone far from his head using only his right hand in Fig. 15. In an actual use configuration, the localization variables assessed by a sensor installed near the point (111) where the center of the first antenna (11) is located, by a sensor installed near the point (121) where the center of the second antenna (12) is located, by a sensor installed near the point (131) where the center of the third antenna (13) is located, and by a sensor installed near the point (141) where the center of the fourth antenna (14) is located are used to determine the typical use configuration which is the closest to the actual use configuration. The specialist notes that the performance of two antennas selected among four antennas, as regards MIMO wireless communication, has been investigated for the three typical use configurations defined above, in said article of S. Zhang, K. Zhao, Z. Ying and S. He. However, the analysis of said article is not applicable to the present invention because the device studied in said article does not comprise a multiple-antenna-port and multiple-radio-port antenna tuning apparatus.

The configuration instruction is determined from a set of pre-defined configuration instructions that are stored in a lookup table realized in the processing unit, based on the closest typical use configuration and on the frequencies used for radio communication with the antennas. The specialist understands how to build and use such a lookup table. The specialist understands the advantage of defining and using a set of typical use configurations, which must be sufficiently large to cover all relevant cases, and sufficiently small to avoid an excessively large lookup table.

For instance, the tuning instruction may be a function of one or more quantities representative of a channel matrix, as explained in the eighth embodiment.

For instance, the tuning instruction may be a function of the localization variables and of one or more quantities representative of a channel matrix.

For instance, the tuning instruction may be a function of quantities depending on an impedance matrix presented by the radio ports, as explained in the ninth embodiment.

For instance, the tuning instruction may be a function of the localization variables and of

quantities depending on an impedance matrix presented by the radio ports.

For instance, the tuning instruction may be determined from a set of pre-defined tuning instructions stored in a lookup table, based on the localization variables and on the frequencies used for radio communication with the antennas.

5 Twelfth embodiment.

The twelfth embodiment of a device of the invention, given by way of non-limiting example, also corresponds to the portable apparatus for radio communication represented in Figure 11, and all explanations provided for the tenth embodiment are applicable to this twelfth embodiment.

10 In this twelfth embodiment, the configuration instruction and/or the tuning instruction are determined as a function of:

the localization variables;

the frequencies used for radio communication with the antennas;

15 one or more additional variables, each of the additional variables lying in a set of additional variables, the elements of the set of additional variables comprising: communication type variables which indicate whether a radio communication session is a voice communication session, a data communication session or another type of communication session; a speakerphone mode activation indicator; a speaker activation indicator; variables obtained using one or more accelerometers; user identity variables which depend on the identity of the current user; reception quality variables which for instance include the quantities representative of a channel matrix of the eighth embodiment; and radio port variables which for instance include the real quantities depending on an impedance matrix presented by the radio ports of the ninth embodiment.

25 The elements of said set of additional variables may further comprise one or more variables which are different from the localization variables and which characterize the grip with which a user is holding the apparatus for radio communication.

In this twelfth embodiment, the configuration instruction and/or the tuning instruction may for instance be determined using a lookup table realized in the processing unit.

30 Based on the teachings of the patent of the United States of America number 8,204,446 entitled "Adaptive Antenna Tuning Systems and Methods", the specialist understands that the antenna tuning obtained in this twelfth embodiment may be more accurate than an antenna tuning wherein the tuning instruction is only a function of the localization variables. The specialist also understands that the antenna tuning obtained in this twelfth embodiment may be simultaneously accurate and such that the tuning instruction is generated quickly and without
35 requiring a large computational resource.

Thirteenth embodiment.

As a thirteenth embodiment of an apparatus of the invention, given by way of non-limiting example, we have represented in Figure 16 the block diagram of a portable apparatus for radio communication in a given frequency band, the apparatus for radio communication being a
5 transceiver comprising:

$N = 4$ antennas (11) (12) (13) (14), each of the N antennas being such that it can operate at any frequency in the given frequency band, the N antennas forming an antenna array (1), each of the antennas being a tunable passive antenna comprising at least one antenna control device, one or more characteristics of said tunable passive antenna
10 being controlled using said at least one antenna control device, said at least one antenna control device having at least one parameter having an effect on said one or more characteristics, said at least one parameter being adjustable by electrical means;
a radio device (5) which consists of all parts of the apparatus for radio communication which are not shown elsewhere in Figure 16;

15 a switching unit (6), the switching unit receiving a “configuration instruction” generated automatically within the apparatus for radio communication, the switching unit comprising N input ports each coupled to one and only one of the antennas through a feeder (21) (22) (23) (24), the switching unit comprising $n = 2$ output ports, the switching unit operating in an active configuration determined by the configuration
20 instruction, the active configuration being one of a plurality of allowed configurations, any one of the allowed configurations corresponding to a selection of n input ports among the N input ports, the switching unit providing, for any small signal in the given frequency band and for any one of the output ports, a bidirectional path between said any one of the output ports and one and only one input port of said selection of n input
25 ports;

a sensor unit (8) estimating a plurality of localization variables;
an antenna tuning apparatus (3), the antenna tuning apparatus being a multiple-antenna-port and multiple-radio-port antenna tuning apparatus, the antenna tuning apparatus comprising $n = 2$ antenna ports, each of the output ports being coupled to one and only
30 one of the antenna ports, the antenna tuning apparatus comprising $m = 2$ radio ports, each of the radio ports being coupled to the radio device (5) through an interconnection (41) (42), the antenna tuning apparatus comprising p adjustable impedance devices, where p is an integer greater than or equal to $2m$, the p adjustable impedance devices being referred to as “the adjustable impedance devices of the
35 antenna tuning apparatus” and being such that, at a frequency in said given frequency band, each of the adjustable impedance devices of the antenna tuning apparatus has a reactance, the reactance of any one of the adjustable impedance devices of the antenna

tuning apparatus being adjustable by electrical means; and
a tuning control unit (7), the tuning control unit receiving a “tuning instruction” generated
automatically within the apparatus for radio communication, the tuning control unit
delivering a plurality of “tuning control signals” to the antenna tuning apparatus and
5 the tunable passive antennas, the tuning control signals being determined as a function
of the tuning instruction, the reactance of each of the adjustable impedance devices of
the antenna tuning apparatus being mainly determined by one or more of the tuning
control signals, each of said parameters being mainly determined by one or more of
the tuning control signals.

10 In the previous sentence, “each of said parameters” clearly means “each said at least one
parameter of each said at least one antenna control device of each said tunable passive antenna”.

This thirteenth embodiment may possibly use some aspects of the technique disclosed in the
French patent application number 14/00666 of 20 March 2014, entitled “Communication radio
utilisant des antennes accordables et un appareil d’accord d’antenne”, corresponding to the
15 international application number PCT/IB2015/051644 of 6 March 2015 entitled “Radio
communication using tunable antennas and an antenna tuning apparatus”.

INDICATIONS ON INDUSTRIAL APPLICATIONS

The invention is suitable for radio communication using multiple antennas. Thus, the
invention is suitable for MIMO radio communication. The apparatus for radio communication
20 may be an apparatus for MIMO radio communication, that is to say an apparatus for MIMO
radio reception and/or an apparatus for MIMO radio emission.

The invention provides the best possible characteristics using very close antennas, hence
presenting a strong interaction between the antennas. The invention is therefore particularly
suitable for mobile apparatuses for radio communication, for instance mobile phones, tablet
25 computers and portable computers.

CLAIMS

1. A method for radio communication with several antennas in a given frequency band, using an apparatus for radio communication that includes N antennas (11) (12) (13) (14), where N is an integer greater than or equal to 3, each of the N antennas being such that it can operate at any
5 frequency in the given frequency band, the method comprising the steps of:
selecting n antennas among the N antennas, where n is an integer greater than or equal to 2 and less than or equal to N minus 1, using a switching unit (6) comprising N input ports and n output ports, each of the N input ports being coupled, directly or indirectly, to one of the N antennas, the switching unit providing, for signals in the given
10 frequency band and for any one of the n output ports, a path between said any one of the n output ports and one of the input ports, said one of the input ports being coupled to one of the n selected antennas, the n selected antennas being determined by a “configuration instruction”;
coupling the n output ports, directly or indirectly, to n antenna ports of an antenna tuning
15 apparatus (3) comprising, in addition to said n antenna ports, m radio ports and p adjustable impedance devices, where m is an integer greater than or equal to 2 and where p is an integer greater than or equal to $2m$, the p adjustable impedance devices being referred to as “the adjustable impedance devices of the antenna tuning apparatus” and being such that, at a frequency in said given frequency band, each of
20 the adjustable impedance devices of the antenna tuning apparatus has a reactance, the reactance of any one of the adjustable impedance devices of the antenna tuning apparatus being adjustable by electrical means; and
generating a “tuning instruction”, the tuning instruction having an effect on the reactance of each of the adjustable impedance devices of the antenna tuning apparatus.
- 25 2. An apparatus for radio communication using several antennas in a given frequency band, the apparatus for radio communication comprising:
 N antennas (11) (12) (13) (14), where N is an integer greater than or equal to 3, each of the
 N antennas being such that it can operate at any frequency in the given frequency band;
30 a processing unit, the processing unit delivering a “configuration instruction” and a “tuning instruction”;
a switching unit (6) comprising N input ports and n output ports, where n is an integer greater than or equal to 2 and less than or equal to N minus 1, each of the N input ports being coupled, directly or indirectly, to one of the N antennas, the switching unit
35 operating in an active configuration determined by the configuration instruction, the active configuration being one of a plurality of allowed configurations, the switching

unit providing, in any one of the allowed configurations, for signals in the given frequency band and for any one of the n output ports, a path between said any one of the n output ports and one of the input ports;

5 an antenna tuning apparatus (3) comprising n antenna ports, m radio ports and p adjustable impedance devices, where m is an integer greater than or equal to 2 and where p is an integer greater than or equal to $2m$, the p adjustable impedance devices being referred to as “the adjustable impedance devices of the antenna tuning apparatus” and being such that, at a frequency in said given frequency band, each of the adjustable impedance devices of the antenna tuning apparatus has a reactance, the reactance of
10 any one of the adjustable impedance devices of the antenna tuning apparatus being adjustable by electrical means, the n output ports being coupled, directly or indirectly, to the n antenna ports; and

a tuning control unit (7), the tuning control unit receiving the tuning instruction, the tuning control unit delivering a plurality of “tuning control signals”, the tuning control signals
15 being determined as a function of the tuning instruction, the reactance of each of the adjustable impedance devices of the antenna tuning apparatus being mainly determined by one or more of the tuning control signals.

3. The apparatus for radio communication of claim 2, wherein the plurality of allowed configurations is such that, for any one of the N input ports, there exists at least one allowed
20 configuration in which the switching unit provides, for signals in the given frequency band, a path between one of the output ports and said any one of the N input ports.

4. The apparatus for radio communication of claim 2, wherein the antenna tuning apparatus (3) is such that, at said frequency in said given frequency band, there exists a diagonal impedance matrix referred to as the given diagonal impedance matrix, the given diagonal impedance matrix
25 being such that, if an impedance matrix seen by the antenna ports is equal to the given diagonal impedance matrix, then the reactance of any one of the adjustable impedance devices of the antenna tuning apparatus has an influence on an impedance matrix presented by the radio ports.

5. The apparatus for radio communication of claim 4, wherein the antenna tuning apparatus (3) is such that, at said frequency in said given frequency band, if the impedance matrix seen by the
30 antenna ports is equal to the given diagonal impedance matrix, then the reactance of at least one of the adjustable impedance devices of the antenna tuning apparatus has an influence on at least one non-diagonal entry of the impedance matrix presented by the radio ports.

6. The apparatus for radio communication of claim 2, wherein the antenna tuning apparatus (3) is made up of n antenna tuning apparatuses each comprising one of said antenna ports, one of

said radio ports, and two or more of said adjustable impedance devices of the antenna tuning apparatus.

7. The apparatus for radio communication of claim 2, wherein the apparatus for radio communication comprises a radio receiver, the tuning instruction being a function of one or more quantities representative of a channel matrix.
8. The apparatus for radio communication of claim 2, wherein the apparatus for radio communication comprises a radio transmitter, the tuning instruction being a function of q real quantities depending on an impedance matrix presented by the radio ports, where q is an integer greater than or equal to m .
9. The apparatus for radio communication of claim 2, further comprising a localization unit, the localization unit estimating a plurality of variables, each of said variables being referred to as "localization variable", each of the localization variables depending on the distance between a part of a human body and a zone of the apparatus for radio communication, each of the localization variables having an influence on the configuration instruction.
10. The apparatus for radio communication of claim 9, wherein the configuration instruction is determined from a set of pre-defined configuration instructions stored in a lookup table, based on the localization variables and on the frequencies used for radio communication with the antennas.

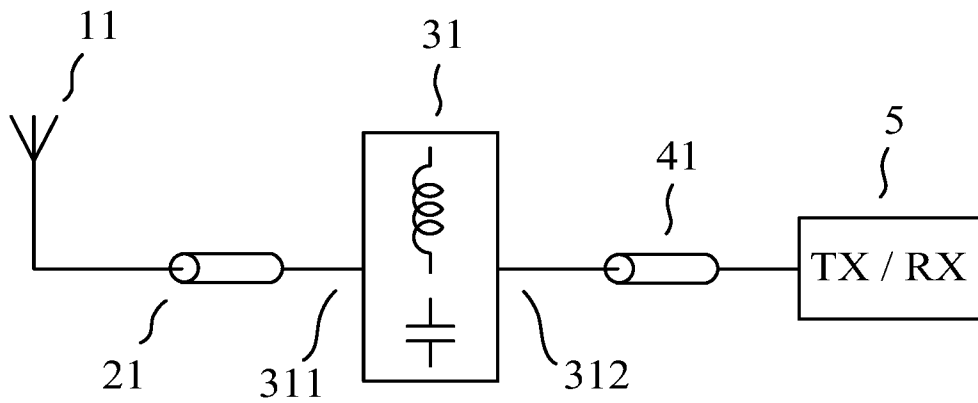


FIG. 1

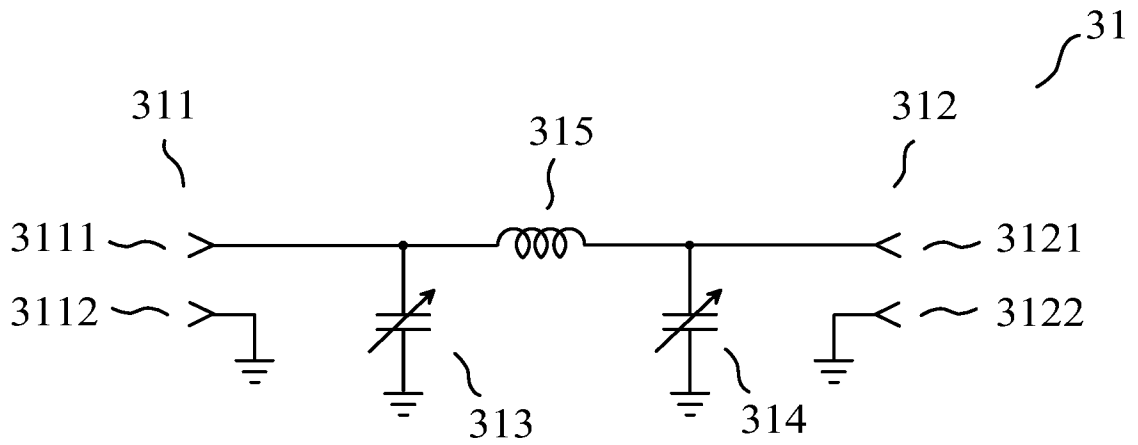


FIG. 2

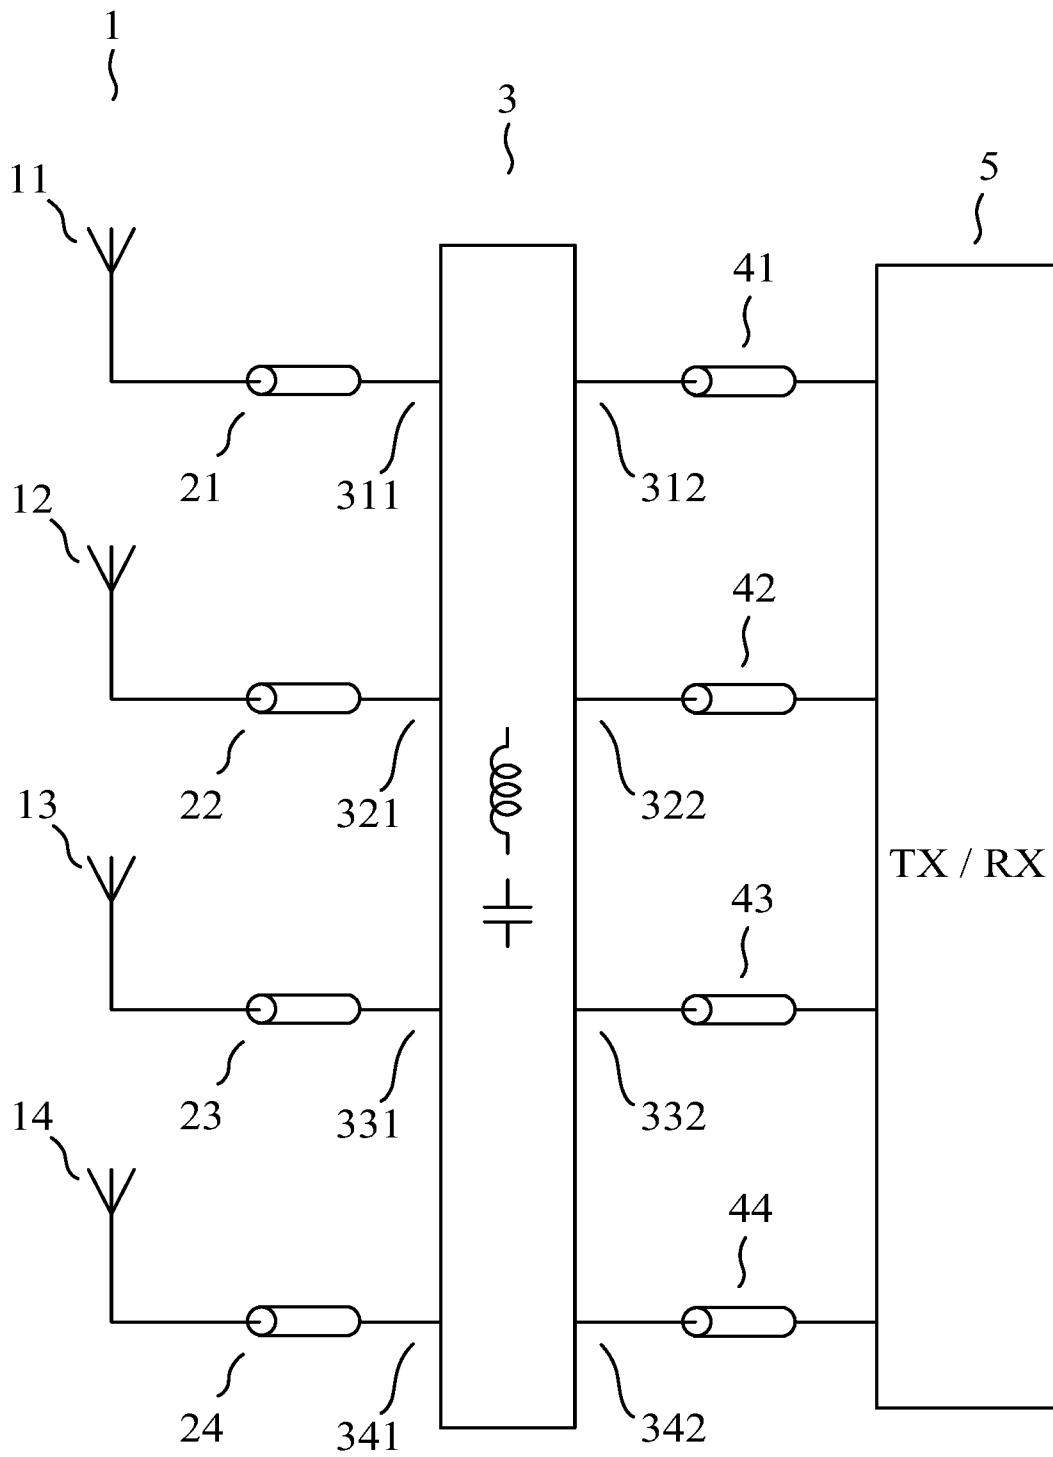


FIG. 3

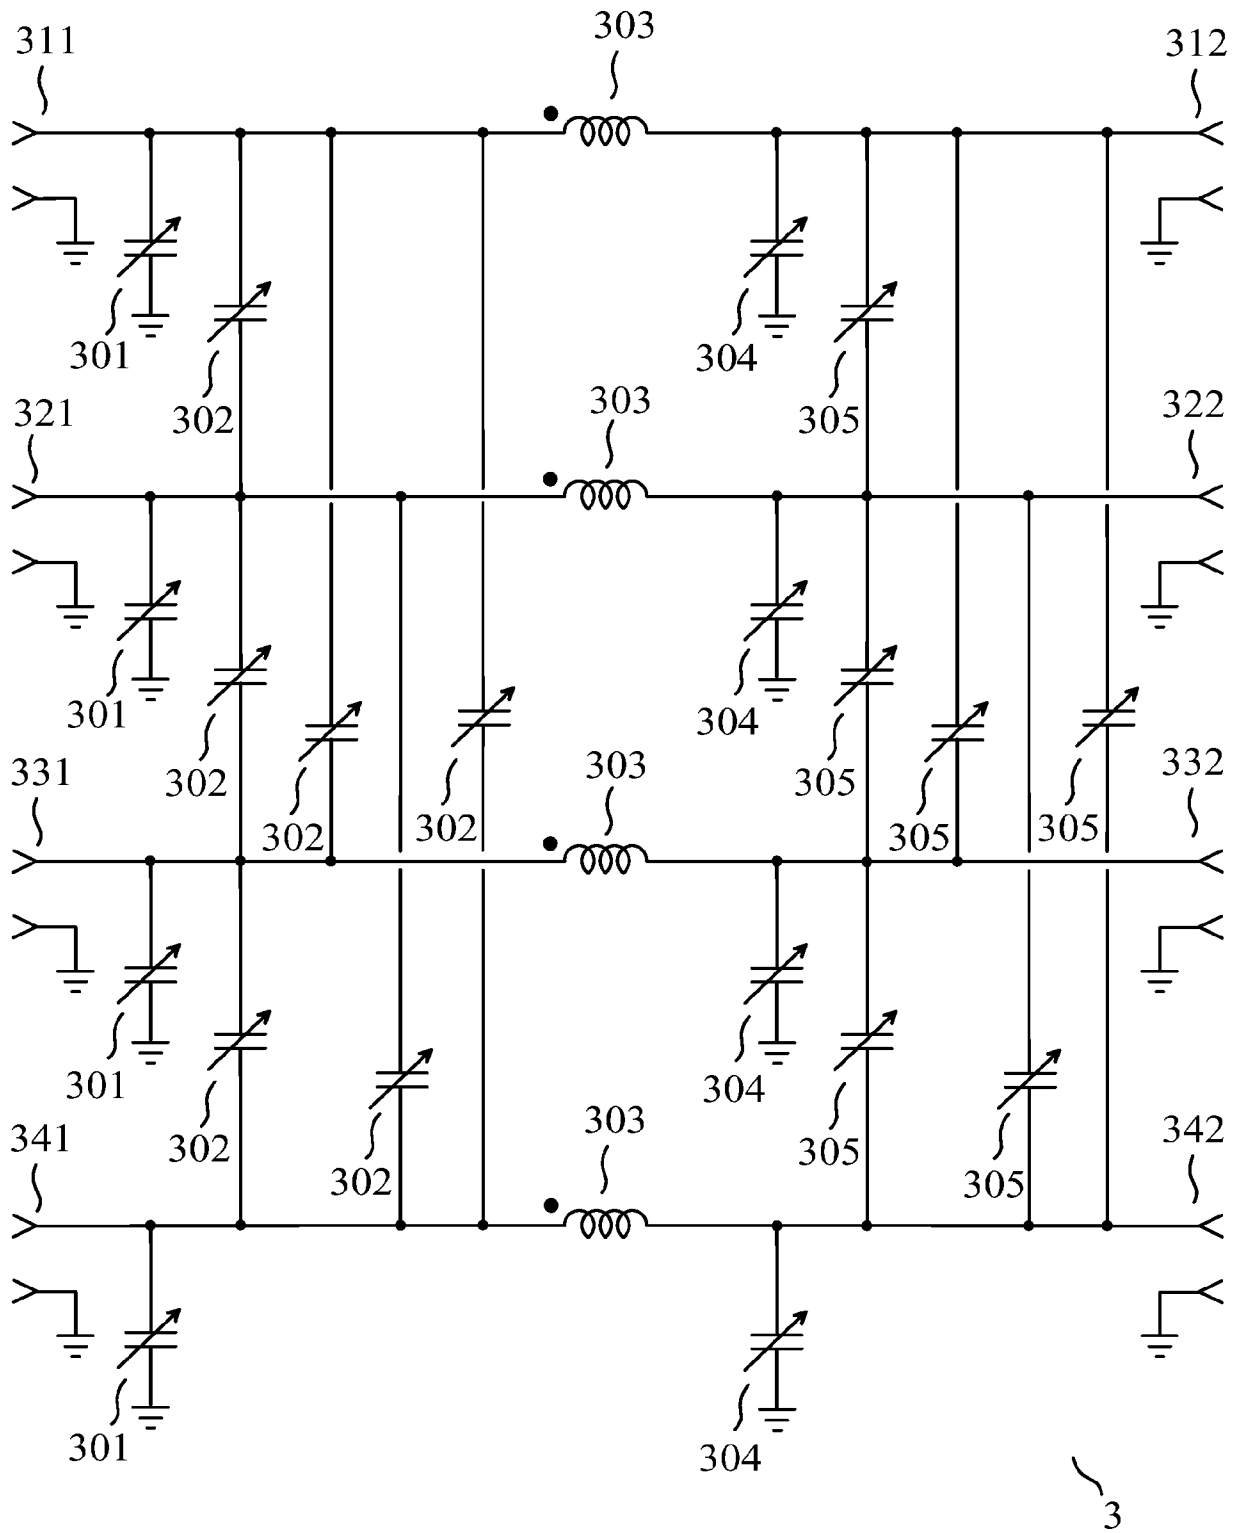


FIG. 4

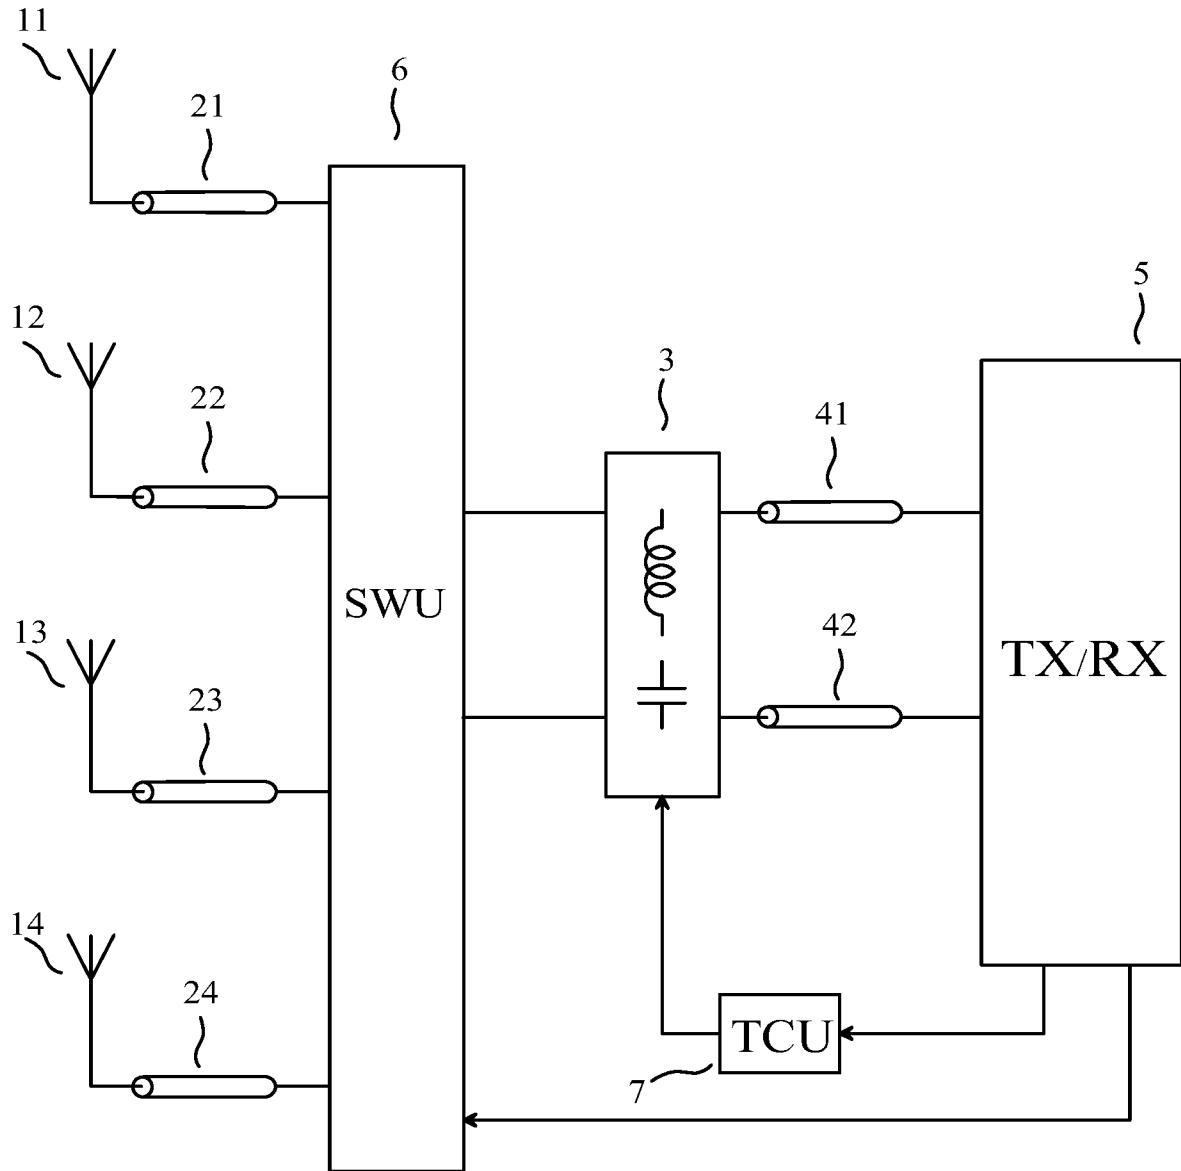


FIG. 5

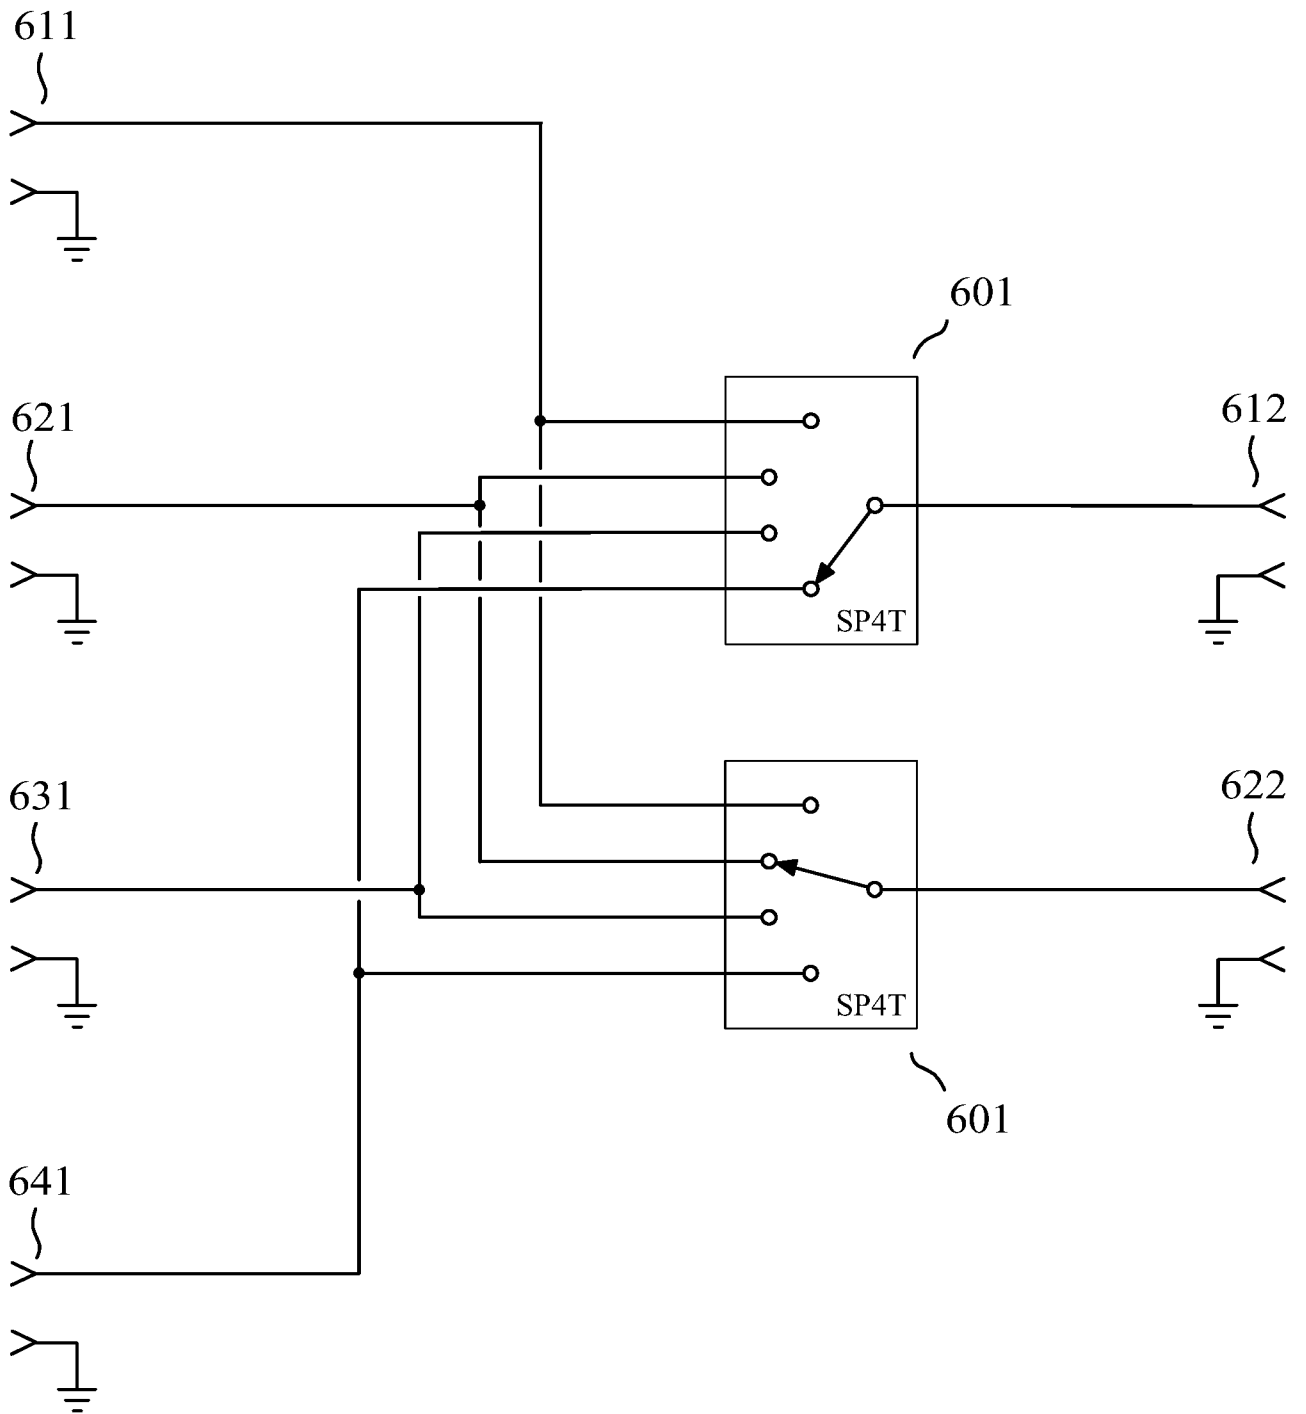


FIG. 6

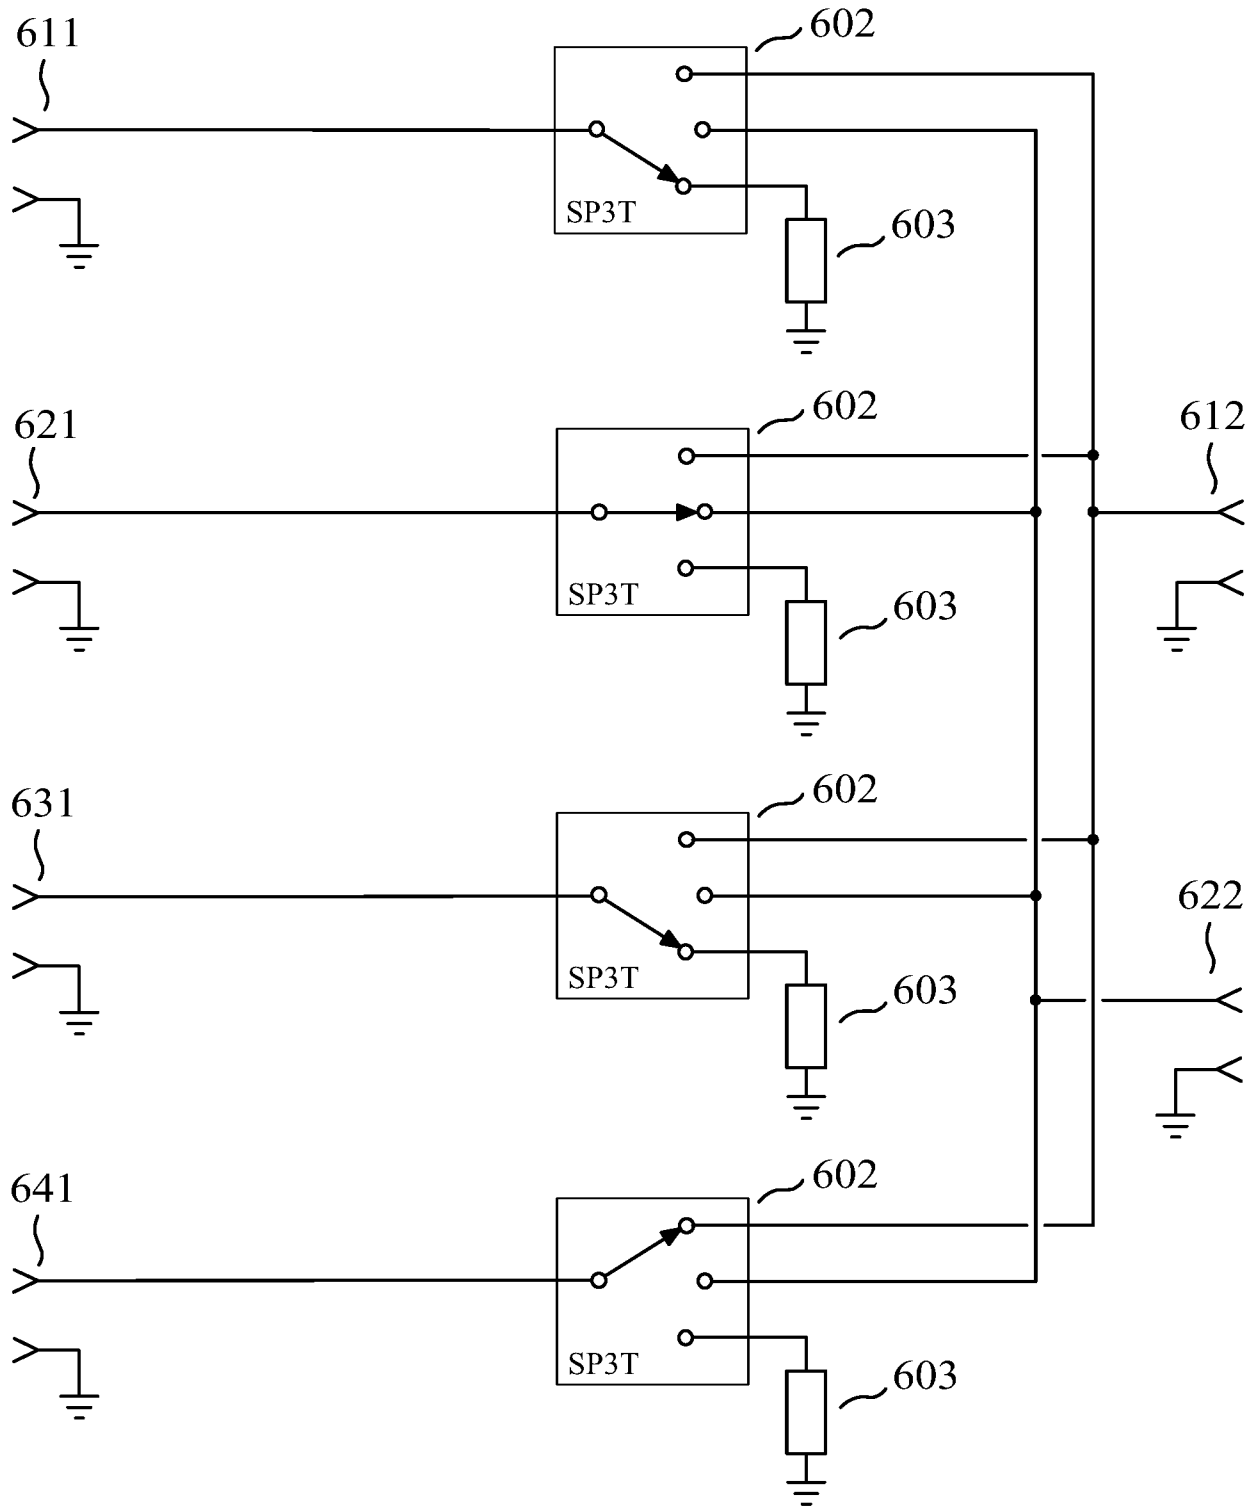


FIG. 7

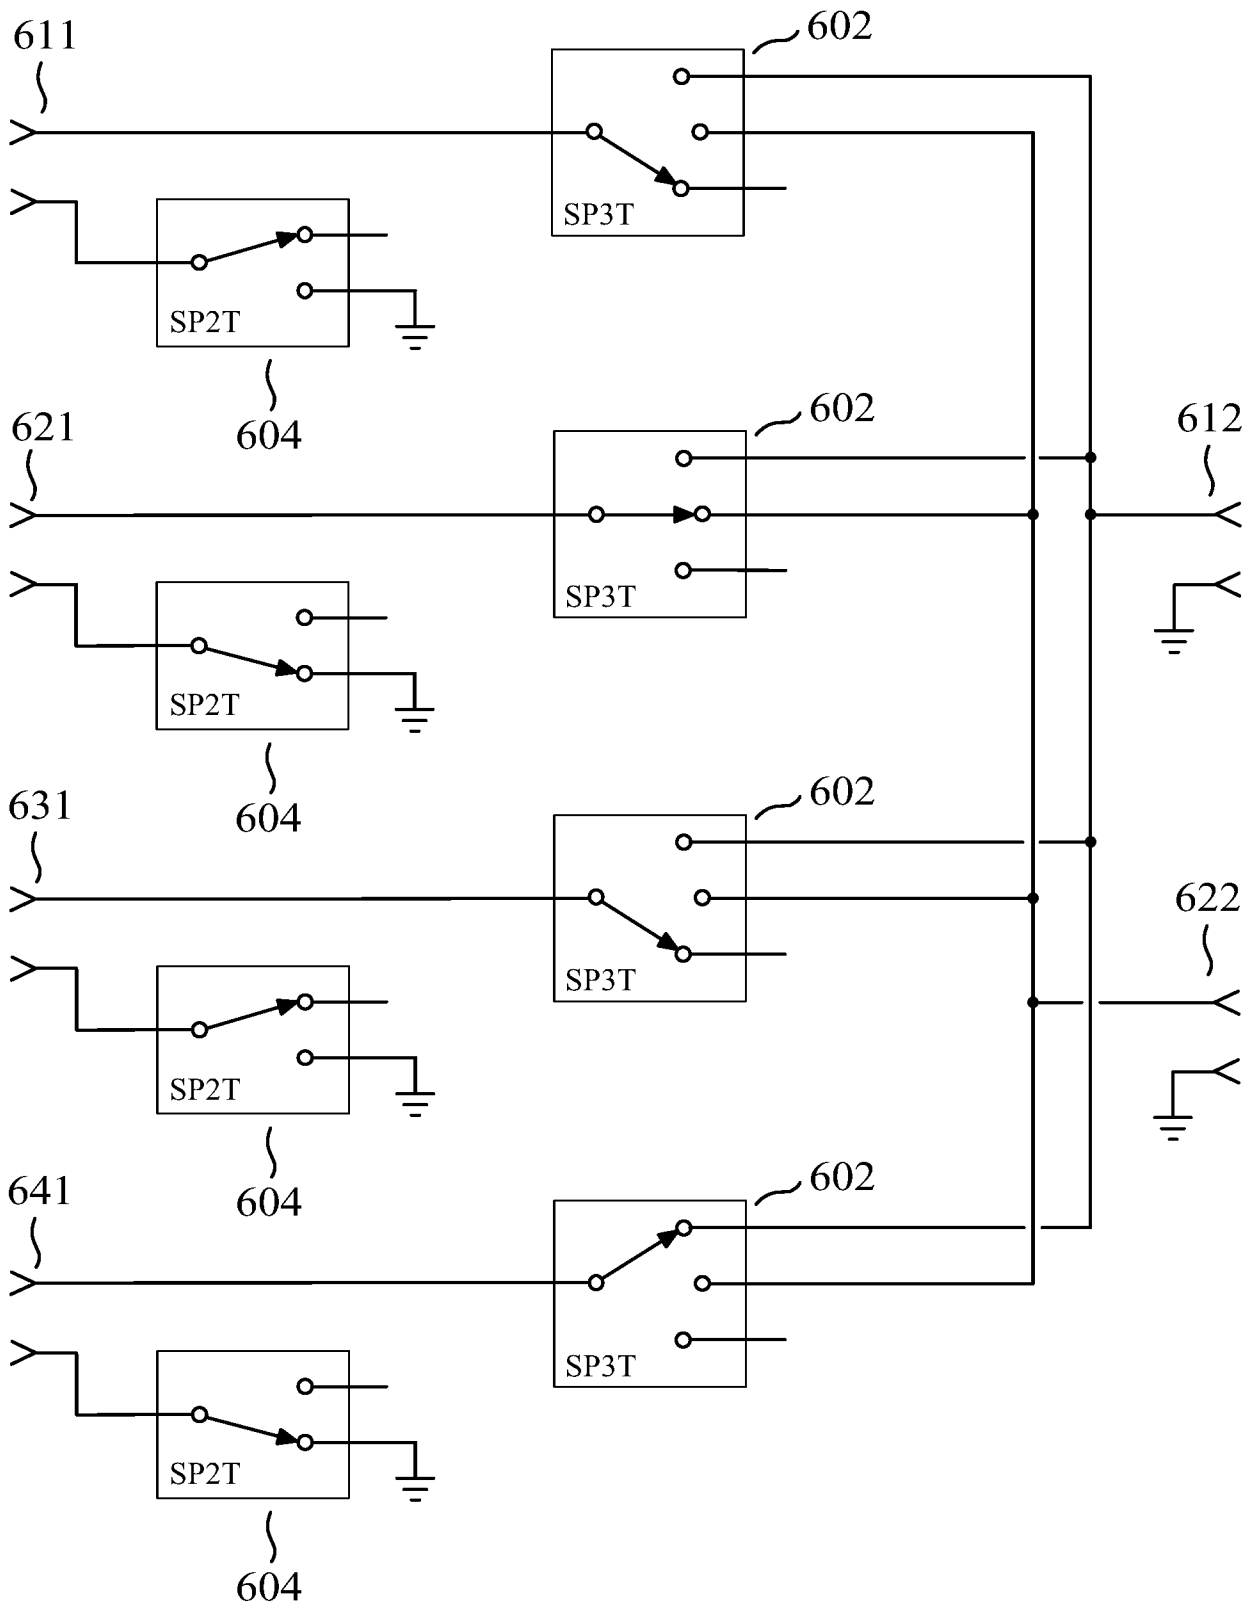


FIG. 8

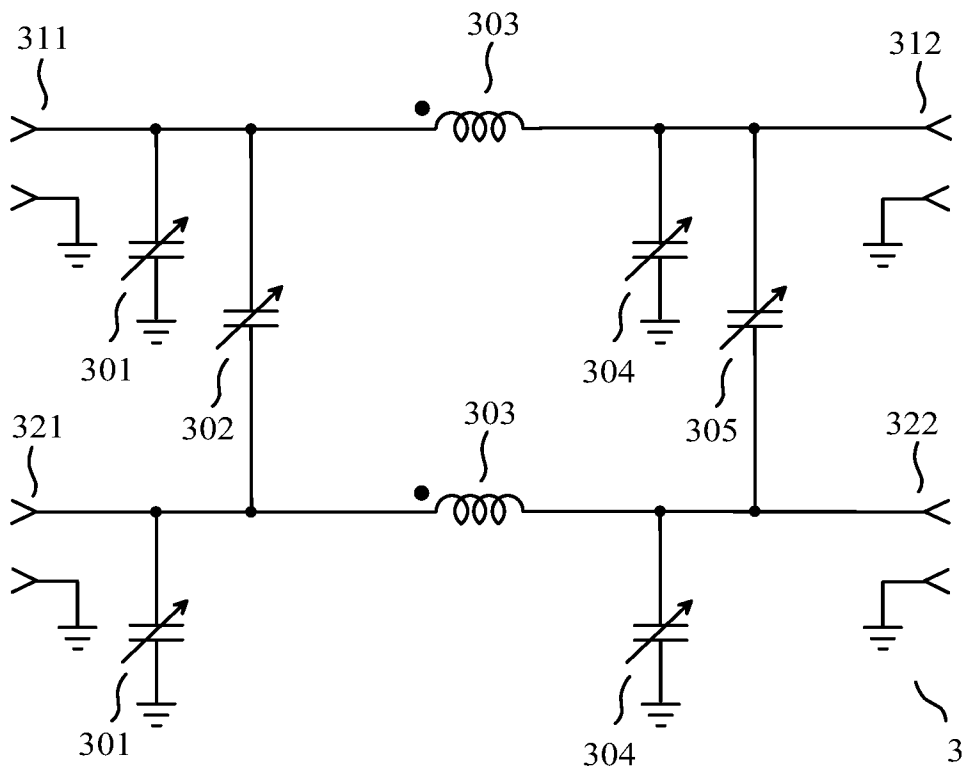


FIG. 9

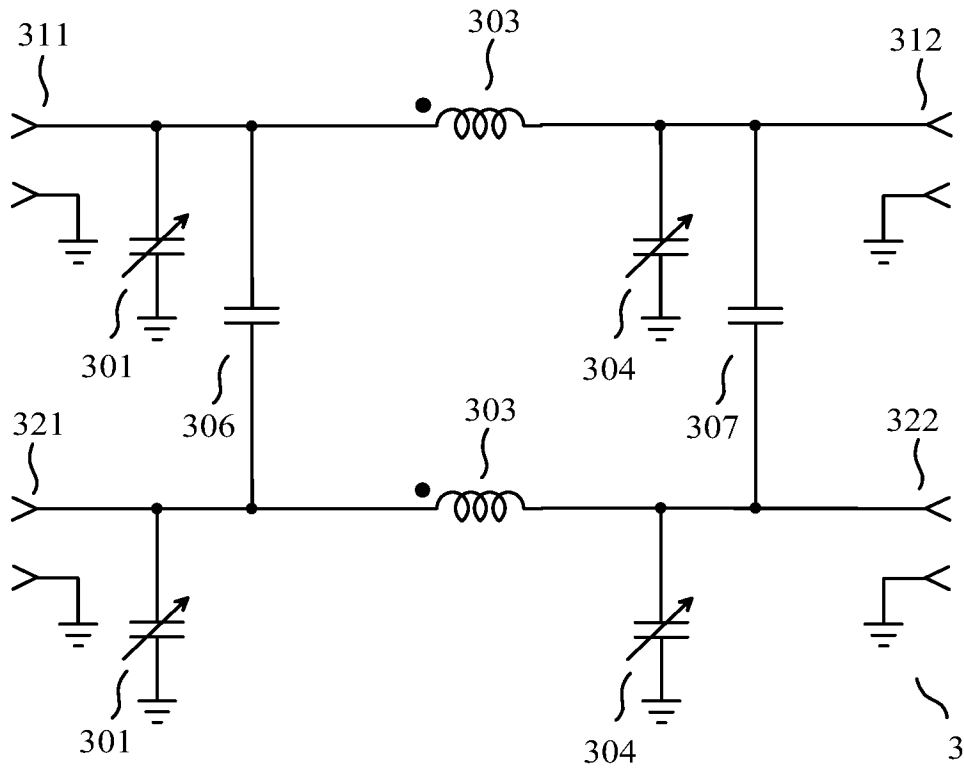


FIG. 10

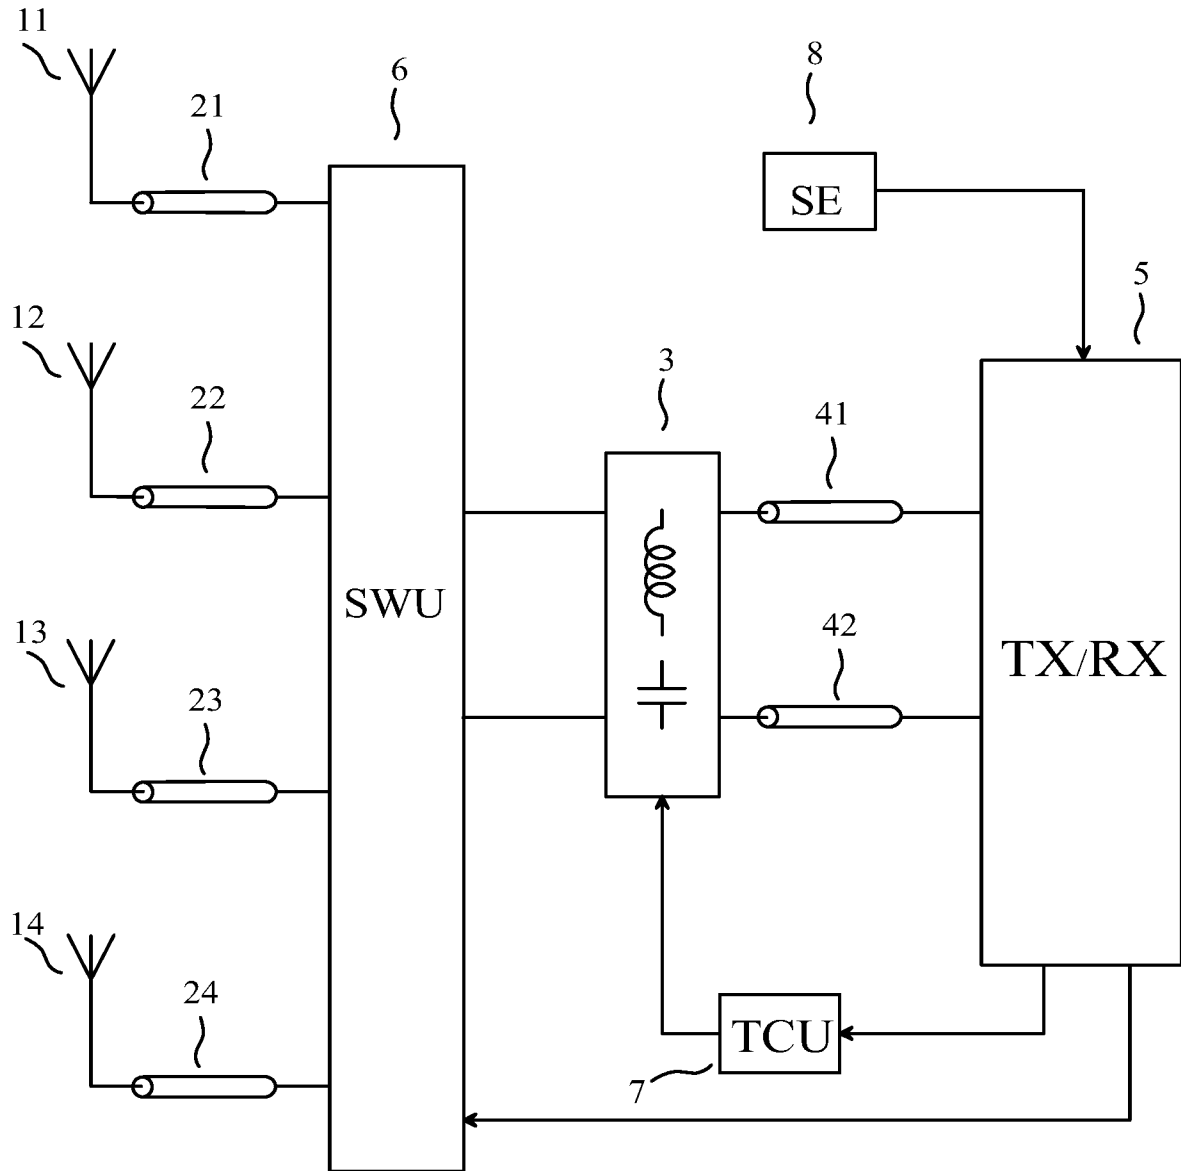


FIG. 11

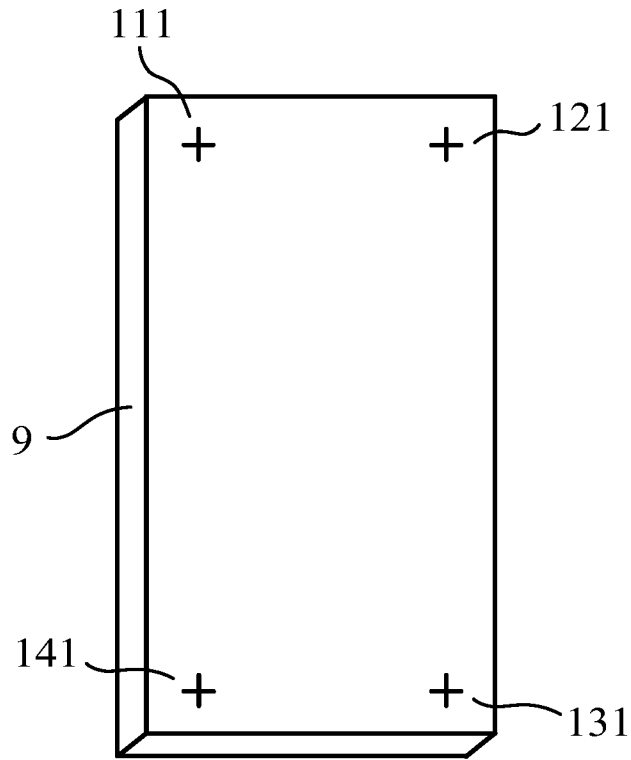


FIG. 12

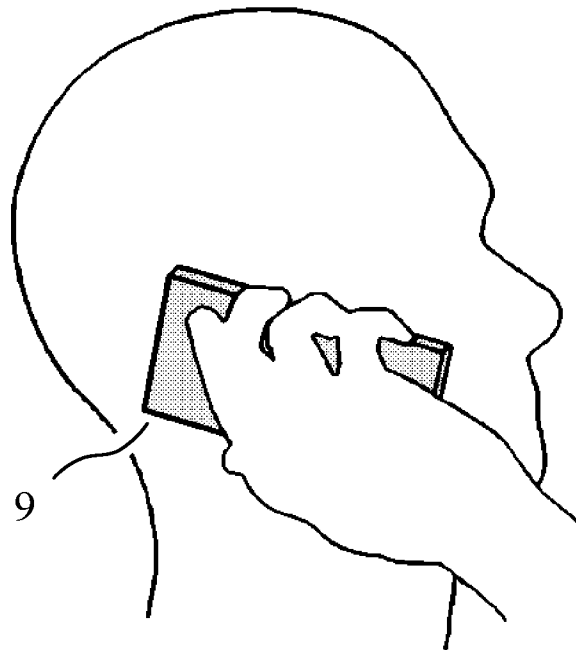


FIG. 13

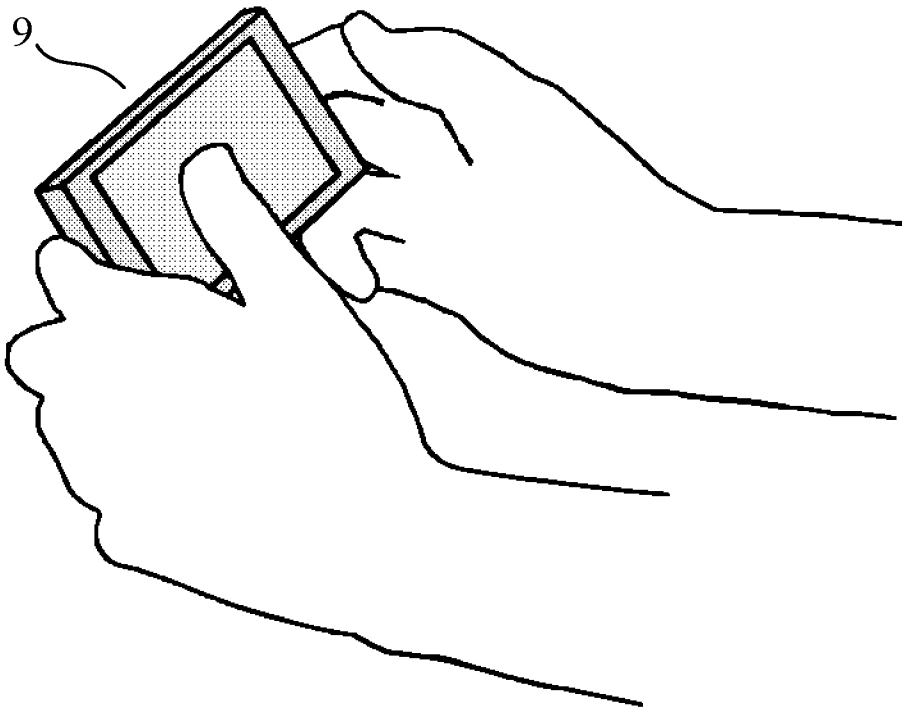


FIG. 14

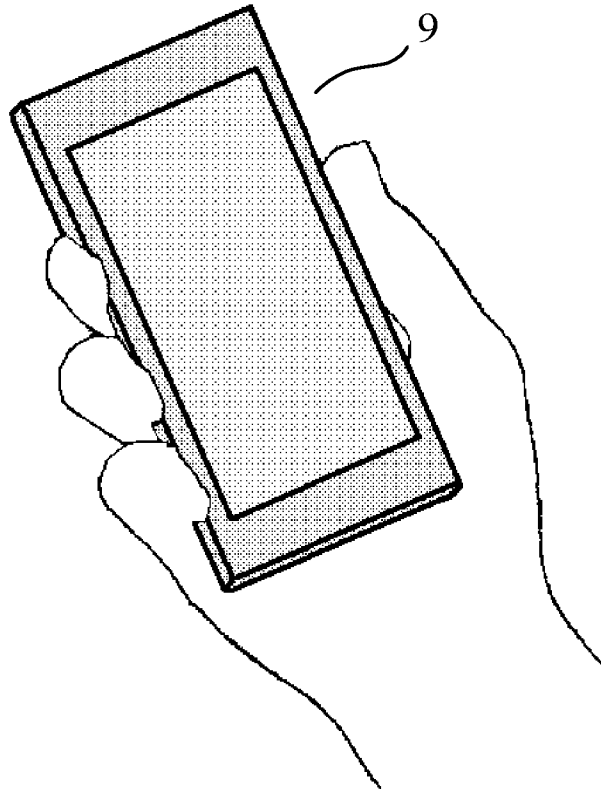


FIG. 15

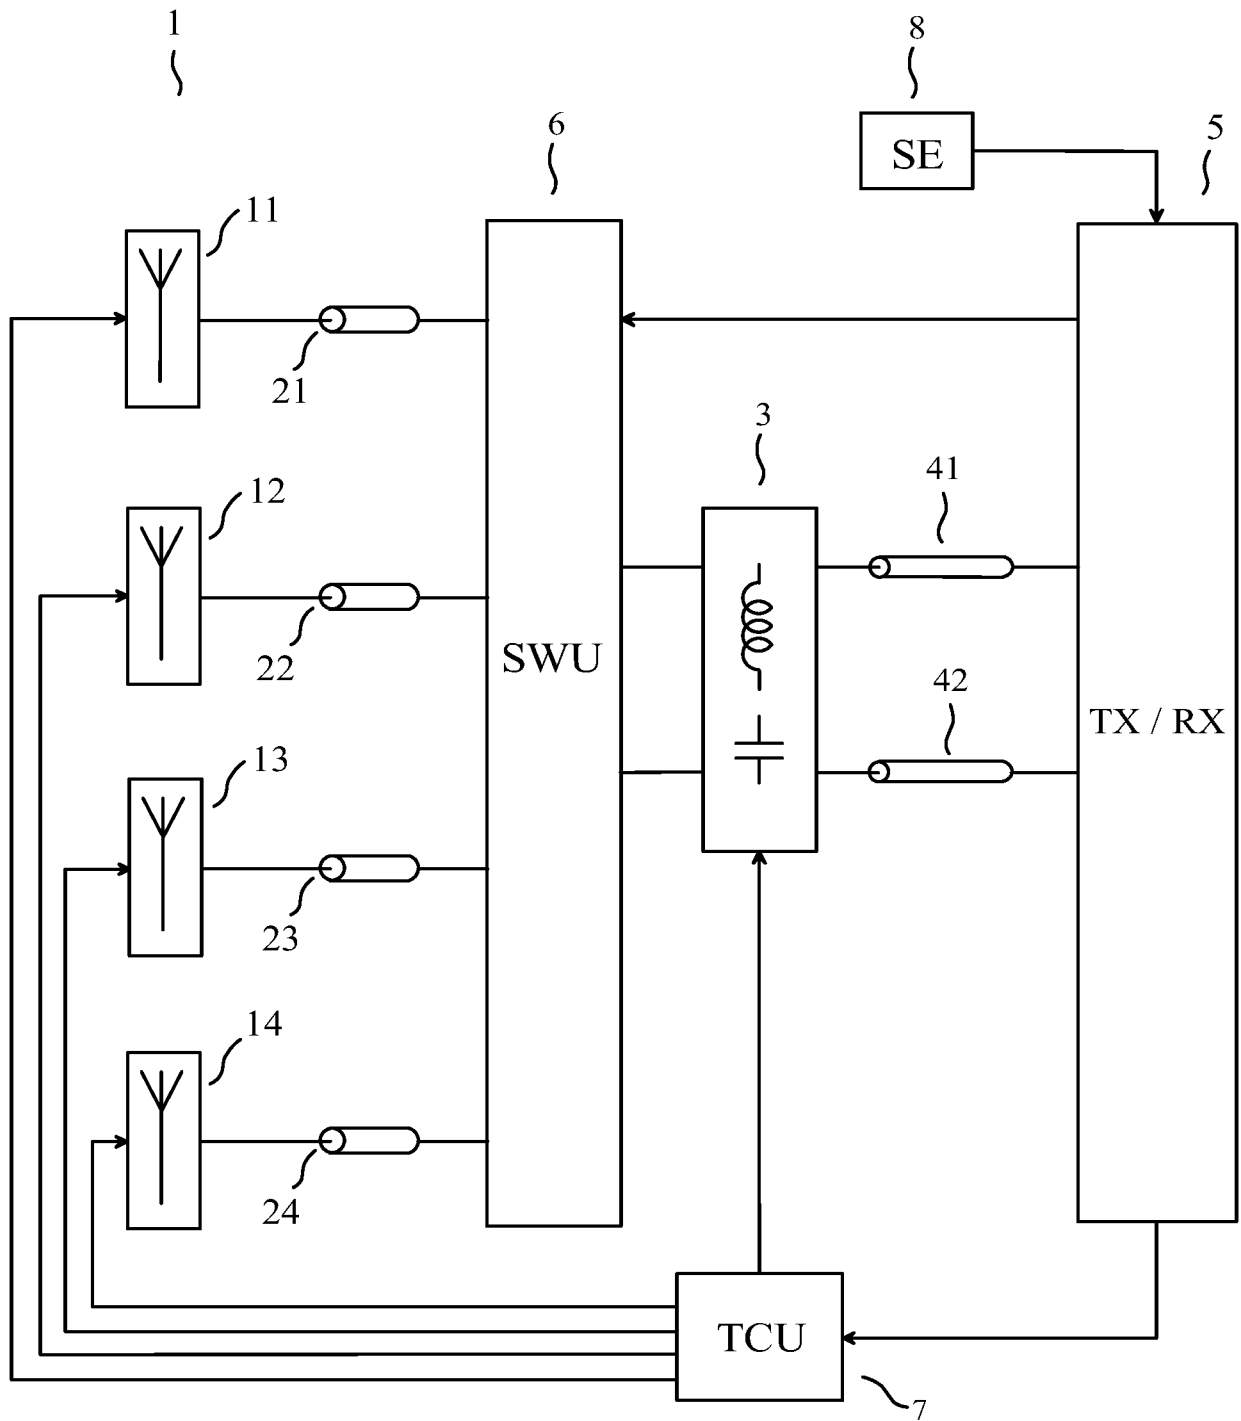


FIG. 16

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2015/052974

A. CLASSIFICATION OF SUBJECT MATTER INV. H04B7/04 H04B1/04 H03H7/40 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) H04B H03H		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data, INSPEC, COMPENDEX		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2014/049486 A1 (TEKCEM [FR]; BROUDE FREDERIC [FR]; CLAVELIER EVELYNE [FR]) 3 April 2014 (2014-04-03) abstract figures 3-6 page 5, line 29 - page 18, line 38 claims 1-13 ----- -/--	1-10
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents :		
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed		"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
Date of the actual completion of the international search <p align="center">14 August 2015</p>		Date of mailing of the international search report <p align="center">24/08/2015</p>
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer <p align="center">Mouanda, Thierry</p>

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2015/052974

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>PAWANDEEP S TALUJA ET AL: "Communication theory perspective on antenna selection for compact transceivers", COMMUNICATIONS (ICC), 2012 IEEE INTERNATIONAL CONFERENCE ON, IEEE, 10 June 2012 (2012-06-10), pages 4078-4083, XP032274077, DOI: 10.1109/ICC.2012.6364251 ISBN: 978-1-4577-2052-9 abstract figures 2-3 I. Introduction II. SYSTEM MODEL</p>	1-10
A	<p>----- ALEKSANDER KREWSKI ET AL: "Matching network synthesis for mobile MIMO antennas based on minimization of the total multi-port reflectance", ANTENNAS AND PROPAGATION CONFERENCE (LAPC), 2011 LOUGHBOROUGH, IEEE, 14 November 2011 (2011-11-14), pages 1-4, XP032080707, DOI: 10.1109/LAPC.2011.6114021 ISBN: 978-1-4577-1014-8 abstract figures 1-2 I. INTRODUCTION II: MULTI-PORT ANTENNA MATCHING</p>	1-10
A	<p>----- WO 2008/030165 A1 (LAU BUON KIONG [SE]; BACH ANDERSEN JOERGEN [DK]) 13 March 2008 (2008-03-13) abstract figure 3 page 7, line 14 - page 17, line 14 -----</p>	1,2,7,10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2015/052974

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2014049486 A1	03-04-2014	FR 2996082 A1	28-03-2014
		US 2014323075 A1	30-10-2014
		WO 2014049486 A1	03-04-2014

WO 2008030165 A1	13-03-2008	EP 2084778 A1	05-08-2009
		JP 5002651 B2	15-08-2012
		JP 2010503261 A	28-01-2010
		US 2010201598 A1	12-08-2010
		WO 2008030165 A1	13-03-2008
